

IR Quattro HD-2 24 m

Fine work on a large area.

- Offers the largest detection range in our IR range
- 5,200 switching zones for finest detection
- 4 pyro sensors can be individually de-/activated
- Sensitivity digitally adjustable
- Ideal for open-plan offices and classrooms

 **Bluetooth®
MESH**




 **professional** line

 Bluetooth® MESH Wireless Configuration and Networking	 Detects the smallest movements with 5200 switching zones	 Measures brightness for automatic lighting control	 Temperature measure- ment on the IP, KNX and DALI-2 IPD bus interfaces	 Humidity measurement on the IP, KNX and DALI-2 IPD bus interfaces
---	---	---	---	---

Infrared presence detector

IR Quattro HD-2 24 m

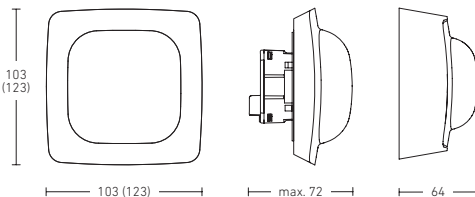

				
360° PIR with square detection	Detection zone 9 x 9 m presence	Max. 10 m mounting height	Configuration via the STEINEL Connect app	Electronic sensitivity adjustment of the four pyro sensors
				Order details (concealed wiring) COM1 4007841 064310 COM2 4007841 064334 DALI-2 APC* 4007841 064358 DALI-2 IPD 4007841 064372 KNX 4007841 064846 IP 4007841 065959 BT IPD (Slave) 4007841 064396
Further presence detectors in the latest generation				
				
True Presence®	True Presence® Multisensor			
				
HF 360-2	Hallway			
Order details (surface mounting) COM1 4007841 064327 COM2 4007841 064341 DALI-2 APC* 4007841 064365 DALI-2 IPD 4007841 064389 KNX 4007841 064853 IP 4007841 065942 BT IPD (Slave) 4007841 064402				
Order details (recessed mounting) COM1 4007841 079406 KNX 4007841 079413				

*from the 2nd half of 2023