

STEINEL CONNECT APP


This is how to update your existing STEINEL Connect product to the new Bluetooth Mesh standard:

Switch from the STEINEL Smart Remote app to the STEINEL Connect app.

STEINEL Connect App




1. Get ready to start Mesh-Update

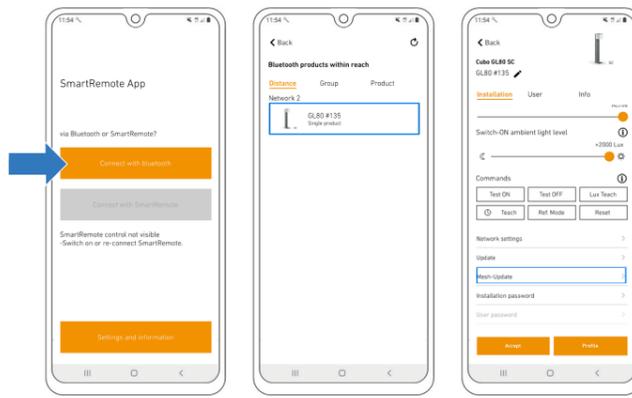

- Download the STEINEL Connect app. You will need this to complete the process.
- Start the **STEINEL Smart Remote app** and tap **"Connect via Bluetooth"**.
- Via Bluetooth, now search for the product you want to update and connect to it.
- Scroll to the network, update and password settings.
- Select the new **"Mesh-Update"** button.


(If this button is not displayed, go one step back.)

2. Carry out Mesh-Update

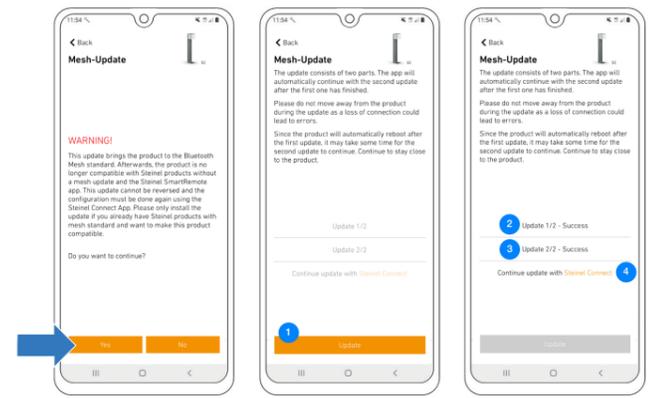


- **Note:** You cannot undo the Mesh-Update!
- Tap **"Update"** to start updating.
- Update 1/2 now begins.
- Once update 1/2 has been completed, the product will re-start. The connection is restored automatically.
- As soon as the connection is restored, update 2/2 will start automatically.
- Having successfully completed both updates, you must now continue in the **STEINEL Connect app**. Tapping the **orange link** automatically opens the app.

3. Update firmware

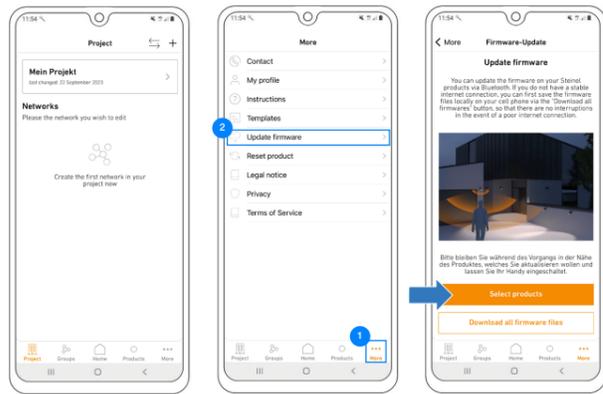


- In the **STEINEL Connect app**, navigate to the **"More"** tab.
- And open **"Update firmware"**.
- Tap **"Select products"**.

4. Carry out firmware update

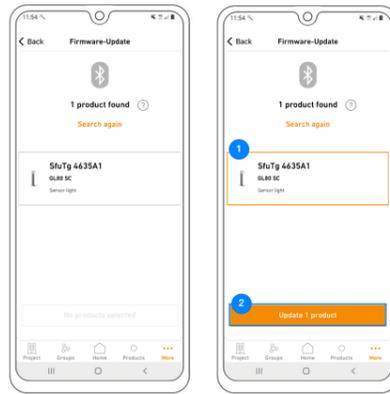

- You will now see the product with the completed Mesh-Update as **"SfuTg xxxxxx"**.
- Select the product and start the last update.
- **You have now successfully completed the Mesh-Update.** You will now find the product with the correct designation in the product search function and can add it to your network.


5. Set up product in the new network

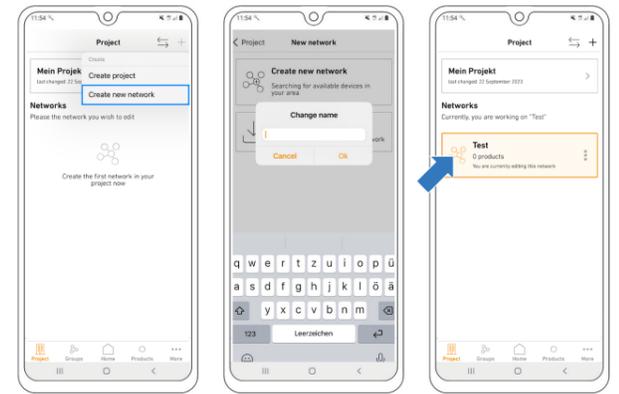

Note: You only need create a new network if a network does not already exist. Otherwise continue at points 6 and 7.


- Create a new network.
- Give the network an appropriate name.
- The newly named network will now come up as one of your own networks.

6. Add product to network

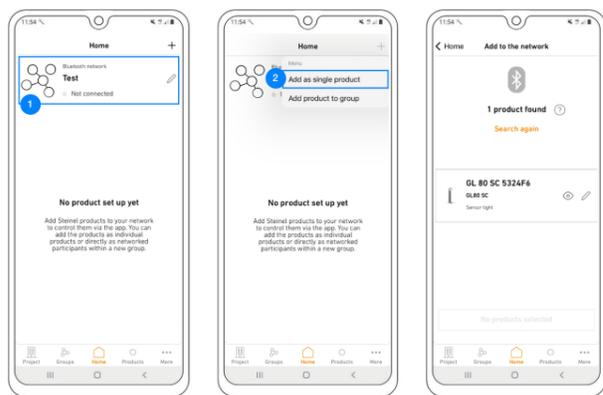

- Select your network.
- Add your product as a single product.
- The product will now be added to the network.

7. Finish configuring product

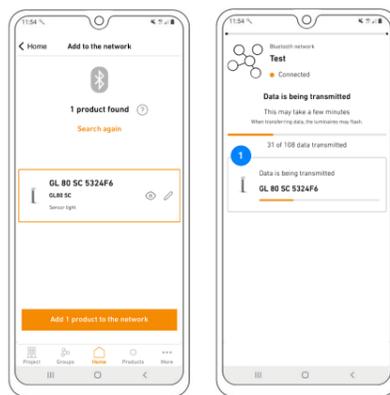

- Once the data transfer is complete, the product can be used as normal.

Any questions? Our technical support service will be please to assist you:
service@steinel.de
Phone: +49 (0) 5245 / 448 - 188