




Path light

GL 65 S. Simple elegance for paths and driveways.

The GL 65 S and GL 65 bollard and path lights ensure elegance around the house. Made from high-quality aluminium with an opal glass lamp, they are a perfect match for the L 605 S wall light and our L 620 CAM SC camera sensor light. The sensor version reliably detects any movement within a 180° radius and a range of 8 metres. With its elegant soft light start, the GL 65 S provides pleasant and safe lighting on driveways and paths. Also available without a sensor.

Complements the
L 620 CAM SC and L 605 series









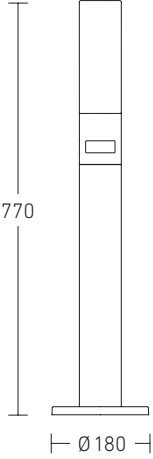




 <p>180° infrared sensor</p>	 <p>10% basic light for more security</p>	 <p>Optional 4-hour continuous light</p>
---	--	---

Path light

GL 65 S



 <p>Outdoor light</p>	<p>575 lm</p> <p>Light output</p>	 <p>Max. radius 8m*</p>	 <p>10 - 2000 lux*</p>	 <p>5 sec - 15 min*</p>	
 <p>Soft light start</p>	<p>3000 K</p> <p>Warm white light</p>	<p>>36,000 h</p> <p>Service life of the integrated LEDs</p>	 <p>IP44</p>		
 <p>STEINEL LED system</p>	 <p>4 intelligent programmes</p>	 <p>770</p> <p>Ø 180</p>	<p>Technical specifications – GL 65 S</p> <p>Dimensions (LxØ) 770 x 180 mm</p> <p>Output/Luminous flux GL 65 S 8.7W/575 lm</p> <p>Output/Luminous flux GL 65 8.5W/575 lm</p> <p>Colour temperature 3000 K</p> <p>Angle of coverage 180°</p> <p>Twilight setting 10–2000 lux</p> <p>Time setting 5s–15 min</p> <p>IP rating/class IP 44</p> <p>Enclosure material Aluminium</p> <p>Cover material Transparent glass</p> <p>Order details</p> <p>GL 65 S, anthracite (with sensor) 4007841 069476</p> <p>GL 65, anthracite (without sensor) 4007841 069469</p>		
 <p>High-quality aluminium</p>	 <p>High-precision sensor</p>				

* Applies for the GL 65 S sensor variant | This product contains an energy efficiency class "E" light source.