

High-frequency presence detector

HF 360-2

Our specialist for special situations.

The proven presence detector with a new design: now available with temperature and humidity measuring. Ideal for use in stairwells, WCs and side rooms. Bluetooth Mesh takes the effort out of setting them up, putting them into operation and interconnecting them.





 professional line

 Bluetooth[®] MESH		
Wireless configuration and networking	Temperature measuring with the bus interfaces KNX, IP and DALI-2 IPD	Humidity measuring with the bus interfaces KNX, IP and DALI-2 IPD

High-frequency presence detector

HF 360-2

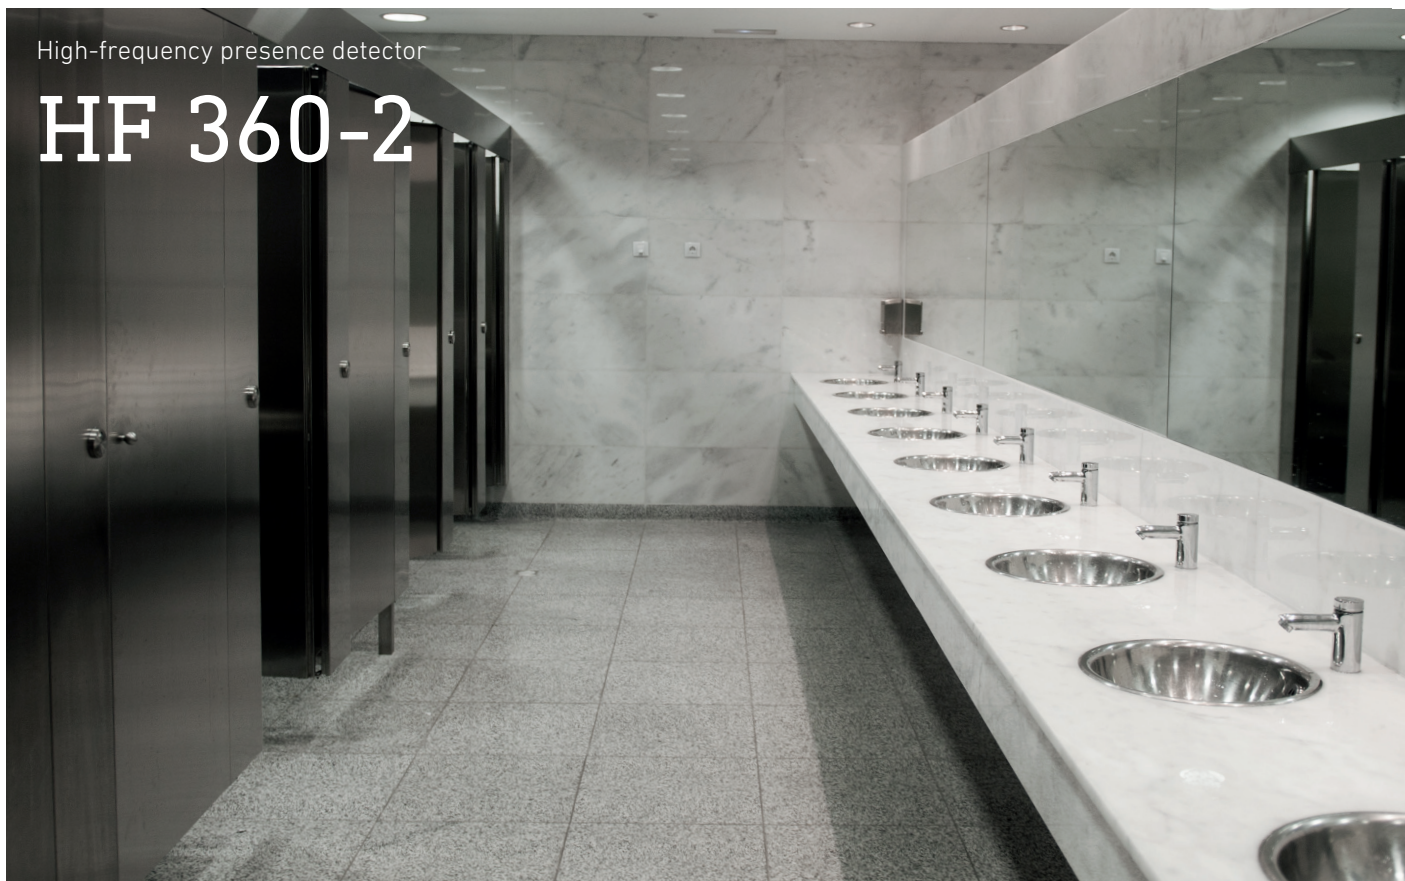

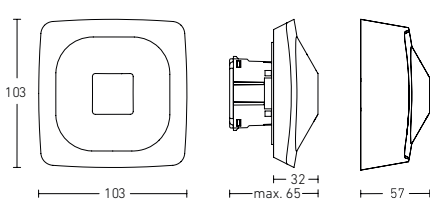	 Reach Ø 12 m max. and through glass and lightweight construction stud walls	 Mounting height 4 m max.	 Electronic sensitivity setting	7 Interfaces
 UV protected material				HF 360-2 technical specifications Mounting height max. 2.50–4.00 m Reach radial and tangentialØ 12 m Ordering details (concealed installation) COM1 4007841 086558 COM2 4007841 086794 DALI-2 APC 4007841 086596 DALI-2 IPD..... 4007841 086619 KNX V3.5 4007841 086695 IP 4007841 086671 BT IPD (Slave) 4007841 086572 Ordering details (surface installation) COM1 4007841 086763 COM2 4007841 086787 DALI-2 APC 4007841 086589 DALI-2 IPD..... 4007841 086602 KNX V3.5 4007841 086718 IP 4007841 086640 BT IPD (Slave) 4007841 086565
The latest presence detectors of the next generation				
 True Presence®	 True Presence® Multisensor			
 Hallway	 IR Quattro HD-2			