

XLED PRO Expanse S

Panoramic light right into every corner.

- Wide-angle panoramic illumination thanks to three powerful LED panels – ideal for courtyards and driveways
- High light output with 1642 lumens in warm white (3000 K) – selectable with 13.6 W (without sensor) or 14.3 W (S)
- Reliable motion detection with 240° detection angle and up to 12 m reach
- Fully adjustable floodlight head – swivelling, tilting and lockable
- Robust design with IP54 protection and IK03 impact resistance
- Available in anthracite or white, optionally without motion sensor




Expanse



Expanse S



 max. Ø 12 m	 2–2.000 lx	 max. installation height 6.0 m	 240°	Technische Daten Dimensions (L x B x H) 195 x 195 x 198 mm Power supply 220 – 240 V / 50 – 60 Hz Power consumption (no) 13,6 W, 121 lm/W Power consumption (S) 14,3 W, 115 lm/W Total luminous flux..... 1642 lm Colour temperature.....3.000 K Time setting (S)..... 10 Sek. – 15 Min. Basic light level.....No Installation height (max.).....6,00 m Twilight switch.....Yes Adjustable twilight threshold..... 2 – 2.000 lx Ordering information LED FLOODLIGHT XLED PRO EXPANSE S Anthracite4007841 091200 White.....4007841 091217 LED STRAHLER XLED PRO EXPANSE Anthracite4007841 091224 White.....4007841 091231
 connectable via cable	 IP54	 10 sec.. – 60 Min	LED lifetime 30 years (Ø 4.5 h/day)	
 IK03				

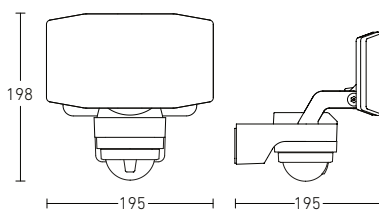

Technical drawing showing the dimensions of the floodlight:

- Height: 198 mm
- Width: 195 mm
- Depth: 195 mm

