

sensIQ S

V3 white
 EAN 4007841 059613
 Article number 059613



infrared sensor 3 x
100°



3 zones scalable
2-20m



KNX



IP54



2 - 1000 lux



1 min - 60 min



ideal 2 - 5 m



Teach

Teach mode



energy saving

5 years

manufacturer's
warranty steinel-
professional.de/
garantie

Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.

Technical specifications

Dimensions (L x W x H)	128 x 114 x 74 mm
Manufacturer's Warranty	5 years
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	Yes
Version	white
PU1, EAN	4007841059613
Type	Motion detectors
Application, place	Indoors, Outdoors
Application, room	multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors
Colour	white
Colour, RAL	9010
Includes corner wall mount	Yes
Installation site	wall, corner
Installation	Surface wiring, Wall, corner

Detection angle	300 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	Yes
Reach, radial	r = 4 m (42 m ²)
Reach, tangential	r = 20 m (1047 m ²)
Twilight setting	2 – 1000 lx
Time setting	60 s – 15 Min.
Basic light level function	Yes
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes
KNX functions	Light output 2x, Presence output, Light level, Constant-lighting control, Basic light level function,

sensIQ S

V3 white
 EAN 4007841 059613
 Article number 059613



Technical specifications

Ambient temperature	from -20 up to 50 °C
Material	Plastic
With bus coupling	Yes
Mounting height	2 – 5,00 m
Mounting height max.	5,00 m
Optimum mounting height	2 m

Photo-cell controller, Close range,
 Individual pyro evaluation, Logic
 gate


Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	10 mA
Product category	Motion detector

Accessories

EAN 4007841 608835

Corner wall mount sensIQ S

Detection Zone

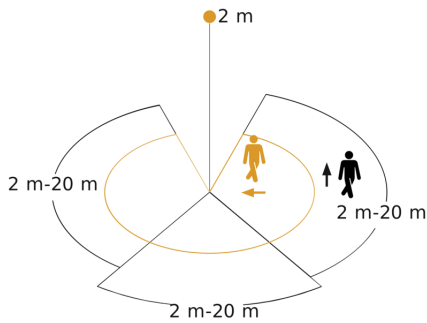

Possible mounting height: 2,00 m - 5,00 m
 Orange: radial
 Black: tangential
 3 scalable zones

Dimension Drawing

