









sensIQ S

V3 white
 EAN 4007841 059613
 Article number 059613



							Teach		5 years
<small>infrared sensor 3 x 100°</small>	<small>3 zones scalable 2-20m</small>	<small>KNX</small>	<small>IP54</small>	<small>2 - 1000 lux</small>	<small>1 min - 15 min</small>	<small>ideal 2 - 5 m</small>	<small>Teach mode</small>	<small>energy saving</small>	<small>manufacturer's warranty steinel- professional.de/ garantie</small>

Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.

Technical specifications

Dimensions (L x W x H)	128 x 114 x 74 mm	Detection angle	300 °
Manufacturer's Warranty	5 years	Angle of aperture	180 °
Settings via	ETS software, Remote control, Bus, Smart Remote	Sneak-by guard	Yes
With remote control	Yes	Capability of masking out individual segments	Yes
Version	white	Electronic scalability	No
PU1, EAN	4007841059613	Mechanical scalability	Yes
Type	Motion detectors	Reach, radial	r = 4 m (42 m ²)
Application, place	Indoors, Outdoors	Reach, tangential	r = 20 m (1047 m ²)
Application, room	multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors	Twilight setting	2 – 1000 lx
Colour	white	Time setting	60 s – 15 Min.
Colour, RAL	9010	Basic light level function	Yes
Includes corner wall mount	Yes	Main light adjustable	0 - 100 %
Installation site	wall, corner	Twilight setting TEACH	Yes
Installation	Surface wiring, Wall, corner	Constant-lighting control	Yes
		KNX functions	Light output 2x, Presence output, Light level, Constant-lighting control, Basic light level function,

sensIQ S

V3 white
 EAN 4007841 059613
 Article number 059613



Technical specifications

Ambient temperature	-20 – 50 °C
With bus coupling	Yes
Mounting height	2 – 5,00 m
Mounting height max.	5,00 m
Optimum mounting height	2 m

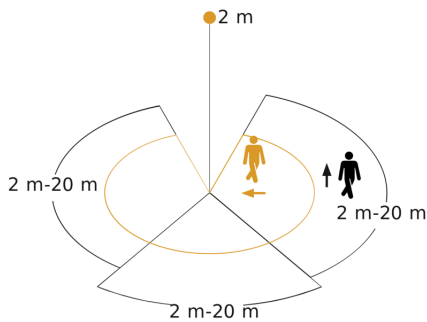
	Photo-cell controller, Close range, Individual pyro evaluation, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	10 mA

Accessories

EAN 4007841 608835

Corner wall mount sensIQ S

Detection Zone



Possible mounting height: 2,00 m - 5,00 m
 Orange: radial
 Black: tangential
 3 scalable zones

Dimension Drawing

