


Multisensor Aerosol KNX

V3.0

EAN 4007841 079192

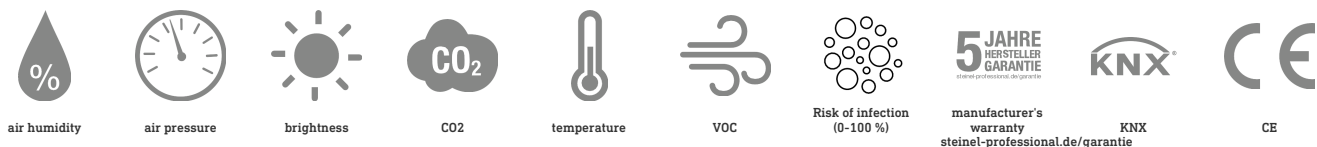

Function description

The professional for better conditions to learn and work in. Multisensor Aerosol KNX not only delivers reliable additional information to the building management system, such as temperature, humidity, air pressure, volatile organic compounds (VOC), CO2 concentration as well a light level. It also uses this as the basis for identifying the potential risk of infection in air and displays such as a communication object for KNX. For a healthy interior climate. Without True Presence® detection.

Technical specifications

Type	Other	With bus coupling	Yes
Dimensions (L x W x H)	33 x 123 x 123 mm	Settings via	ETS software, Bluetooth, Bus
Mains power supply	30 V	With remote control	No
Power consumption	0,5 W	Interconnection	Yes
Power supply, detail	KNX bus	IP-rating	IP20
Sensor Technology	Multisensor	Material	Plastic
Application, place	Indoors	Ambient temperature	0 – 40 °C
Installation site	ceiling	Application, room	classroom, lecture hall, one-person office, recreation room, duty room, conference room / meeting room, Indoors, kitchenette
Installation	Concealed wiring	Colour	white
Twilight setting TEACH	Yes	Colour, RAL	9003
Twilight setting	2 – 1000 lx	Manufacturer's Warranty	5 years
Constant-lighting control	No	PU1, EAN	4007841079192
KNX functions	Risk of infection, Udes air, Comfort, CO2, Light level, HVAC output, Logic gate, Air pressure, Humidity output, Day / night function, Dewpoint, Temperature output, VOC		

Accessories


EAN 4007841 063870 Surface-mounting adapter for Multisensor

Multisensor Aerosol KNX

V3.0

EAN 4007841 079192

Detection Zone

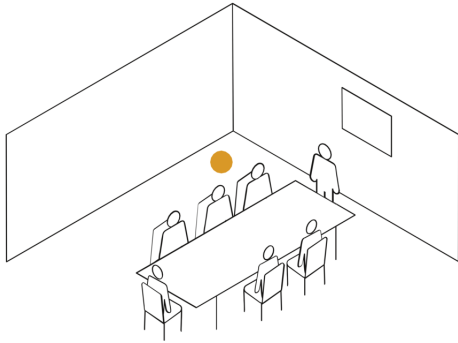

Dimension Drawing

