Multisensor - Professional Line

Multisensor Air KNX

V3.0
EAN 4007841 056346
Article number 056346

.steinel

air humidity	air pressure	brightness	CO2	temperature	VOC	KNX	5 years manufacturer's warranty steinel-professional.de/ garantie	CE

Function description

Multisensor AIR KNX, the air, brightness and temperature specialist. Multisensor Air KNX delivers reliable additional information to the building management system. It measures temperature, humidity, air pressure, volatile organic compounds (VOC), CO2 concentration as well a brightness. Without True Presence® detection. But geared towards the design if the True Presence family. For a modern ceiling look all round. KNX interface for easy integration.

Technical specifications

Dimensions (L x W x H)	33 x 123 x 123 mm		Power consumption	0,5 W
With motion detector	No		Power supply, detail	KNX bus
Manufacturer's Warranty	5 years		With bus coupling	Yes
Settings via	ETS software, Bluetooth, Bus		Technology, sensors	CO2, Photo-cell controller, Air pressure, Air humidity, Temperature, VOC
With remote control	No			
PU1, EAN	4007841056346		Mounting height	4,00 m
Type	Other		Mounting height max.	4,00 m
Application, place	Indoors		Optimum mounting height	2,8 m
Application, room	classroom, lecture hall, one-person office, open-plan office, conference room / meeting room, hotel room, care room, duty room, recreation room, sports hall, reception / lobby, Indoors		Twilight setting	2 – 1000 lx
			Basic light level function	Yes
			Main light adjustable	No
			Twilight setting TEACH	Yes
Colour	white		Constant-lighting control	No
Colour, RAL	9016		KNX functions	Comfort, CO2, Light level, HVAC output, Air pressure, Humidity output, Dewpoint, Temperature
Includes corner wall mount	No			
Installation site	ceiling			

Multisensor Air KNX

V3.0
EAN 4007841 056346
Article number 056346

Technical specifications

Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	from 0 up to 40 °C
Material	Plastic
Mains power supply	30 V

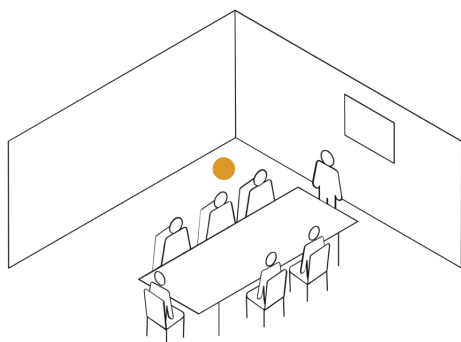|	
	output, VOC, Photo-cell controller, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	15 mA
Product category	Multisensor

Accessories

EAN 4007841 063870	Surface-mounting adapter for Multisensor

Detection Zone

Dimension Drawing

123

123

33