

# Multisensor Air KNX

V3.0  
 EAN 4007841 056346  
 Article number 056346



Luftfeuchte



Luftdruck



Helligkeit



CO2



Temperatur



VOC



KNX

5 years

Herstellergarantie  
 steinel-professional.de/  
 garantie



CE

## Function description

Multisensor AIR KNX, the air, brightness and temperature specialist. Multisensor Air KNX delivers reliable additional information to the building management system. It measures temperature, humidity, air pressure, volatile organic compounds (VOC), CO2 concentration as well as brightness. Without True Presence® detection. But geared towards the design if the True Presence family. For a modern ceiling look all round. KNX interface for easy integration.

## Technical specifications

Dimensions (L x W x H)	33 x 123 x 123 mm	Power consumption	0,5 W
With motion detector	No	Power supply, detail	KNX bus
Manufacturer's Warranty	5 years	With bus coupling	Yes
Settings via	ETS software, Bluetooth, Bus	Technology, sensors	CO2, Photo-cell controller, Air pressure, Air humidity, Temperature, VOC
With remote control	No	Mounting height	4,00 m
PU1, EAN	4007841056346	Mounting height max.	4,00 m
Type	Other	Optimum mounting height	2,8 m
Application, place	Indoors	Twilight setting	2 – 1000 lx
Application, room	classroom, lecture hall, one-person office, open-plan office, conference room / meeting room, hotel room, care room, duty room, recreation room, sports hall, reception / lobby, Indoors	Basic light level function	Yes
Colour	white	Main light adjustable	No
Colour, RAL	9016	Twilight setting TEACH	Yes
Includes corner wall mount	No	Constant-lighting control	No
Installation site	ceiling	KNX functions	Comfort, CO2, Light level, HVAC output, Air pressure, Humidity output, Dewpoint, Temperature

# Multisensor Air KNX

V3.0  
EAN 4007841 056346  
Article number 056346

## Technical specifications


Installation	Concealed wiring, Ceiling	output, VOC, Photo-cell controller, Logic gate	
IP-rating	IP20	Interconnection	Yes
Ambient temperature	0 – 40 °C	Type of interconnection	Master/master, Master/slave
Material	Plastic	Interconnection via	KNX bus
Mains power supply	30 V	Rated current	15 mA

## Accessories

EAN 4007841 063870

Surface-mounting adapter for Multisensor

## Detection Zone

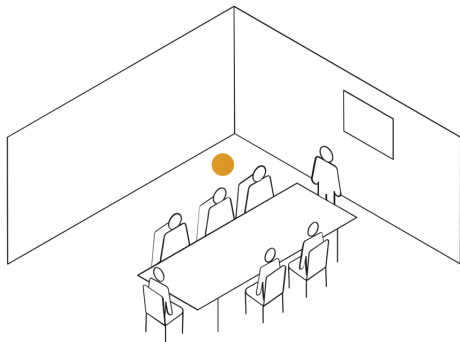

## Dimension Drawing

