


Sensor-switched LED outdoor light

L 710 LED

Silver

EAN 4007841 053192

Article number 053192



3000 K



infrared sensor
360°



max. 8 m



IP44



2 - 2000 lux



5 sec - 15 min



soft light start



10% basic
brightness



manual override
4h



energy saving

Function description

Lighting meets the future. The L 710 LED sensor-switched outdoor light with warm white 3000 K captivates with its pioneering design and creates a unique light pattern with 670 lm and elegant light gradient. With intelligent 360° infrared mini sensor, manual override (4 h), four sensor programmes, including night-light functions as well as soft light start. Output: 8,6 W. Available in anthracite and silver.

L 710 LED

Silver
 EAN 4007841 053192
 Article number 053192




Technical specifications

Dimensions (L x W x H)	140 x 260 x 77 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	2,50 m
Sensor Technology	passive infrared
Output	8,6 W
Interconnection	No
Slave modeselectable	No
Luminous flux	670 lm
Efficiency	78 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Farbwiedergabeindex	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No

Mechanical scalability	No
Reach, radial	r = 2 m (13 m ²)
Reach, tangential	r = 8 m (201 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Functions	4 programme settings geared to practical needs, can be selected on removable sensor module
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Cover material	sticker
Version	Silver
PU1, EAN	4007841053192

Detection Zone

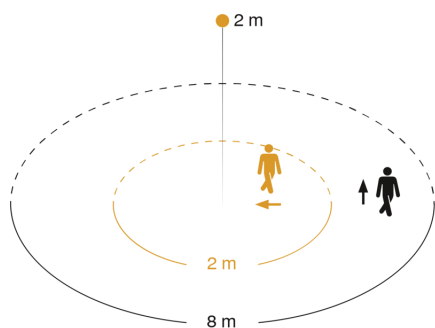

Mögliche Montagehöhe: 1,80 m – 2,50 m
 Orange: radial
 Schwarz: tangential

Dimension Drawing

