


LED floodlight without sensor - Professional Line

# XLED PRO ONE Max

Anthracite

EAN 4007841 069520

Article number 069520

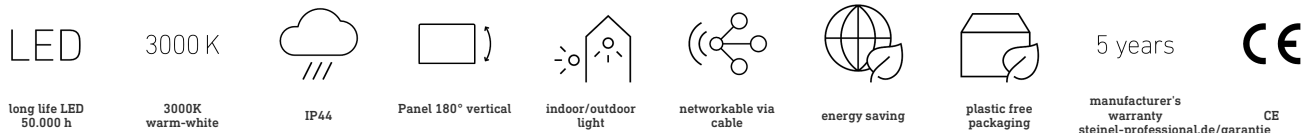

## Function description

Floodlights redefined. Housed in a sophisticated aluminium enclosure, the 180° vertically swivelling floodlight XLED PRO ONE Max without sensor guarantees daylight-bright illumination across large areas with warm white 3000 K and 6093 lm at 49,4 W. Suitable for manual switch operation and for cable-based networking in conjunction with a sensor version. With optional surface-mounting adapter. 5-year guarantee.

## Technical specifications

Dimensions (L x W x H)	202 x 259 x 226 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	49,4 W
Interconnection	Yes
Vernetzung via: Connect Bluetooth Mesh	Cable
Lichtstrom Gesamtprodukt	6093 lm
Gesamtprodukt Effizienz	123 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED cooling system	Passive Thermo Control
With motion detector	No
Photo-cell controller	No

Basic light level function	No
Main light adjustable	No
Functions	Relay output
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Manufacturer's Warranty	5 years
Installation site	ceiling, wall
Cover material	shrouds
Version	Anthracite
PU1, EAN	4007841069520

## Accessories

EAN 4007841 080983 Surface mount adapter XLED PRO ONE Plus + Max

LED floodlight without sensor - Professional Line

# XLED PRO ONE Max


Anthracite

EAN 4007841 069520


Article number 069520



## Dimension Drawing

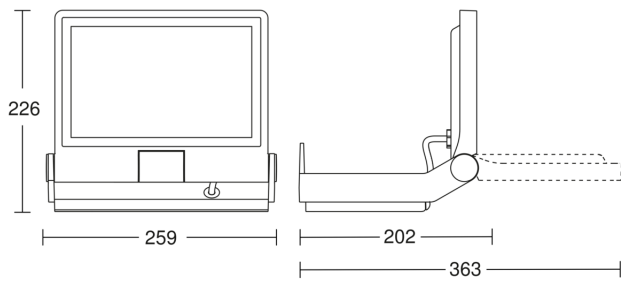

## Slave circuit diagram



## Master/slave interconnection circuit diagram

