

Presence detector - Professional Line

# HF 360

V3 KNX - Concealed wiring

EAN 4007841 059484

Article number 059484



high frequency  
sensor 360°



max. Ø 12 m



KNX 4 channel



IP20



ideal 2,5 - 3,5 m



indoor sensor



iQ-mode

Teach

Teach mode



energy saving

5 years

manufacturer's  
warranty  
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

## Function description

Doesn't miss a thing. HF-presence detector Presence Control PRO HF 360 KNX for indoors, ideal for WCs with toilet cubicles, changing rooms, stairwells, multi-storey car parks, kitchens, installation height up to 3.5 m, with digital BUS interface for controlling 4 lighting channels and HVAC, 1 – 12 m reach, reach is electronically adjustable and can be limited in two directions, detection regardless of temperature, HF-sensor technology also detects movement through glass, wood and stud walls.

# HF 360

V3 KNX - Concealed wiring  
 EAN 4007841 059484  
 Article number 059484



## Technical specifications

Type	Presence detector
Dimensions (L x W x H)	55 x 120 x 120 mm
Mains power supply	30 V
Power consumption	0,7 W
Power supply, detail	KNX bus
Sensor Technology	High frequency
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	2,50 – 3,5 m
Reach, radial	Ø 12 m (113 m <sup>2</sup> )
Reach, tangential	Ø 12 m (113 m <sup>2</sup> )
Reach, detail	1 or 2 detection directions can be masked out by stickers for adjustment to the room situation.
HF-system	5,8 GHz
Detection angle	360 °
Angle of aperture	140 °
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Detection	also through glass, wood and stud walls

Twilight setting TEACH	Yes
Twilight setting	10 – 1000 lx
Time setting	10 s – 1092 Min.
Constant-lighting control	Yes
Basic light level function	Yes
Basic light level function time	1-255 min
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Presence output, Day / night function, Logic gate
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	-25 – 55 °C
Application, room	function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors
Colour	white
Colour, RAL	9010
IDs, certificates	VDE
Manufacturer's Warranty	5 years
Version	KNX - Concealed wiring
PU1, EAN	4007841059484


## Accessories

EAN 4007841 000363	Surface-mounting adapter Control PRO AP Box (IP54)
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 003036	Control PRO guard cage
EAN 4007841 006600	HF-ceiling adapter
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 592912	User remote control RC7 KNX

# HF 360

V3 KNX - Concealed wiring  
EAN 4007841 059484  
Article number 059484

## Detection Zone

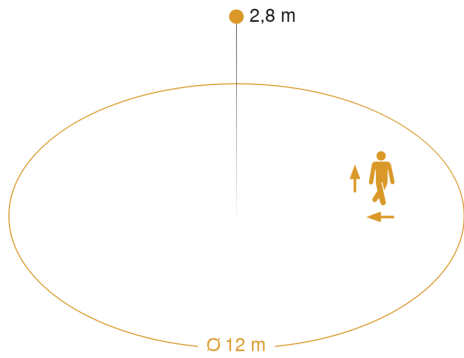

Mögliche Montagehöhe: 2,50 m – 3,50 m  
Orange: radial und tangential

## Dimension Drawing

