

# HF 360-2

IP - concealed  
 EAN 4007841 065973  
 Article number 065973



Hochfrequenz  
Sensor 360°



Max. Ø 12 m



IP20



Montagehöhe max.  
4 m



2 - 2000 Lux



Temperatur



Luftfeuchte



Energie sparen



Plastikfreie  
Verpackung

5 years

Herstellergarantie  
steinel-  
professional.de/  
garantie

## Function description

Smart surveillance professional. The HF 360-2 from the new Control PRO 2 range. Modern look and intelligent 360° HF sensor technology – ideal for stairwells and toilet facilities with cubicles. Conveniently adjusted and interconnected via Bluetooth. Interfaces: COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD (Slave). Mounting height up to 4 m. Reach: 12 m.

## Technical specifications

Dimensions (L x W x H)	65 x 103 x 103 mm	Mounting height	2,50 – 4,00 m
With motion detector	Yes	Mounting height max.	4,00 m
Manufacturer's Warranty	5 years	Optimum mounting height	2,8 m
Settings via	Bluetooth, Web-Interface	HF-system	5,8 GHz
With remote control	No	Detection	also through glass, wood and stud walls
Version	IP - concealed	Detection angle	360 °
PU1, EAN	4007841065973	Angle of aperture	140 °
Type	Presence detector	Sneak-by guard	Yes
Application, place	Indoors	Capability of masking out individual segments	No
Application, room	function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors	Electronic scalability	Yes
Colour	white	Mechanical scalability	No
Colour, RAL	9003	Reach, radial	Ø 12 m (113 m <sup>2</sup> )
Includes corner wall mount	No	Reach, tangential	Ø 12 m (113 m <sup>2</sup> )
Installation site	ceiling	Transmitter power	< 1 mW
Installation	Concealed wiring, Ceiling	Twilight setting	2 – 2000 lx

# HF 360-2


IP - concealed  
 EAN 4007841 065973  
 Article number 065973

## Technical specifications

IP-rating	IP20
Ambient temperature	-25 – 50 °C
Material	Plastic
Mains power supply	18 – 55 V
Power supply, detail	Passive PoE SELV, standard PoE (IEEE 802.3 af)
Technology, sensors	High frequency, Light sensor, Temperature, Air humidity

Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Interconnection via	Bluetooth, LAN

## Detection Zone

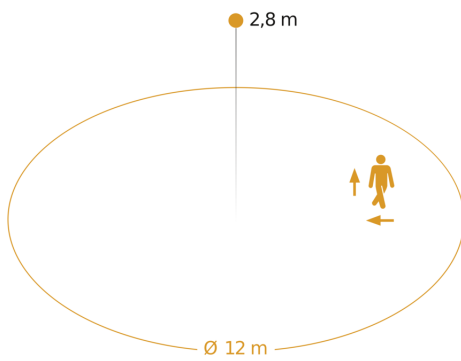

Possible mounting height: 2,50 m – 4,00 m  
 Orange: radial and tangential

## Dimension Drawing

