

Presence detector - Professional Line

IR Quattro MICRO 6m

V3 KNX - black

EAN 4007841 068646

Article number 068646



infrared sensor



max. 4 x 4 m presence



KNX



IP65



2 - 1000 lux

5 years

manufacturer's warranty
steinel-professional.de/
garantie



CE



VDE

Function description

Small sensor. Great performance. The IR Quattro MICRO meets the wish of many architects and planners for a sensor that's as inconspicuous as possible. It impresses with its compact size after installation, low overall height and a micro precision lens (15 x 15 mm). At the same time, the small 360° infrared presence puts on a great performance, covering 36 m². IP65 certification also makes it suitable for rooms exposed to moisture.

Technical specifications

Dimensions (Ø x H)	43 x 71 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	No
Version	KNX - black
PU1, EAN	4007841068646
Type	Presence detector
Application, place	Indoors
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors
Colour	black
Colour, RAL	9005
Includes corner wall mount	No
Installation site	ceiling
Installation	In-ceiling installation, Ceiling

Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Reach, radial	4 x 4 m (16 m ²)
Reach, tangential	6 x 6 m (36 m ²)
Reach, presence	4 x 4 m (16 m ²)
Switching zones	168 switching zones
Twilight setting	2 – 1000 lx
Time setting	60 s – 255 Min.
Basic light level function	Yes
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes

<https://www.steinel.de>

Subject to technical modifications

01.2025 Page 1 from 2

IR Quattro MICRO 6m

V3 KNX - black

EAN 4007841 068646

Article number 068646



Technical specifications

IP-rating	IP65
Ambient temperature	from -25 up to 55 °C
Material	Plastic
Mains power supply	30 V
Power consumption	0,5 W
With bus coupling	Yes
Technology, sensors	Photo-cell controller, passive infrared
Mounting height	2,00 – 5,00 m
Mounting height max.	5,00 m

Constant-lighting control	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Day / night function, Presence output, Light output 4x, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	10 mA
Product category	Presence detector

Accessories


EAN 4007841 593018

Service remote control RC6 KNX

EAN 4007841 592912

User remote control RC7 KNX

Detection Zone

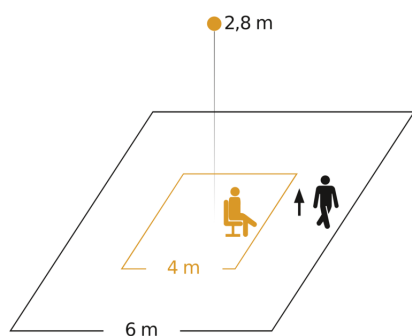

Possible mounting height: 2,00 m – 5,00 m

Orange: presence

Black: tangential

Dimension Drawing

