

LED floodlight without sensor

XLED home 2 M

V2 white

EAN 4007841 033125

Article number 033125



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP44



Panel 180° hor., 180° ver.



networkable via cable



energy saving

5 years

manufacturer's warranty steinel.de/garantie



CE



Light source not exchangeable



Control gear not exchangeable

Function description

Dazzlingly stylish LED floodlight. XLED home 2 M – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1443 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

Technical specifications

Dimensions (L x W x H)	161 x 180 x 181 mm	LED cooling system	HCMC (High Conductive Magnesium Composite)
Mains power supply	220 – 240 V / 50 – 60 Hz	With motion detector	No
Output	13,7 W	Photo-cell controller	No
Power consumption	0,5 W	Impact resistance	IK00
Luminous flux	1443 lm	IP-rating	IP44
Colour temperature	3000 K	Protection class	II
Colour variation LED	SDCM3	Ambient temperature	-20 – 40 °C
Colour Rendering Index	80-89	Housing material	HCMC
With lamp	Yes, STEINEL LED system	Cover material	Plastic, opal
Lamp	LED cannot be replaced	Manufacturer's Warranty	5 years
LED life expectancy (max. °C)	50000 h	PU1, net weight	0,483 kg
LED life expectancy (25 °C)	> 60000 h	Version	white
Drop in luminous flux in accordance with LM80	L70B10	PU1, EAN	4007841033125

LED floodlight without sensor

XLED home 2 M


V2 white

EAN 4007841 033125


Article number 033125



Dimension Drawing

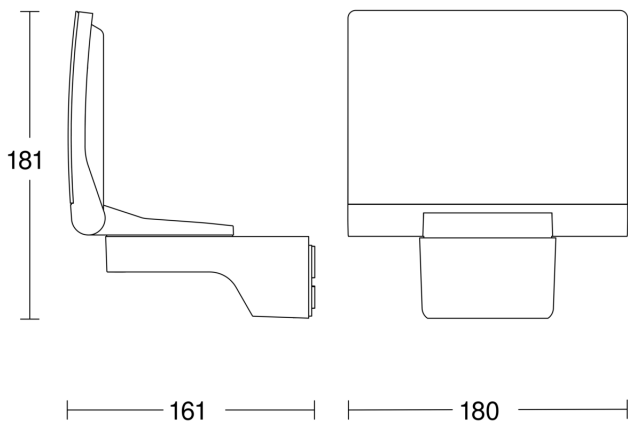

Light Distribution Curve

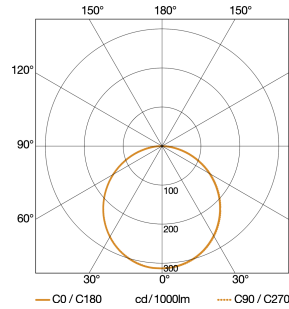

Output	13,7 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1443 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)

Master/slave interconnection circuit diagram

