

LED floodlight without sensor - Professional Line

# XLED PRO 240 M

V2 black

EAN 4007841 068097

Article number 068097



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP44



networkable via cable



energy saving

5 years

manufacturer's warranty  
steinel-professional.de/garantie



ENEC 05



KEMA KEUR



Light source not exchangeable

## Function description

Day-bright illumination throughout: the XLED PRO 240 M outdoor floodlight without motion detector. With fully swivelling LED flat panel and opal diffuser. 2124 lm, 3000 K, 19,3 W. Available in black, white and anthracite. Includes corner wall mount.

## Technical specifications

Dimensions (L x W x H)	161 x 180 x 199 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	19,3 W
Interconnection	No
Luminous flux	2124 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (25 °C)	> 60000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)
With motion detector	No
Basic light level function	No

Main light adjustable	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	HCMC
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Includes corner wall mount	Yes
PU1, net weight	0,64 kg
Version	black
PU1, EAN	4007841068097

LED floodlight without sensor - Professional Line

# XLED PRO 240 M


V2 black

EAN 4007841 068097

Article number 068097



## Dimension Drawing

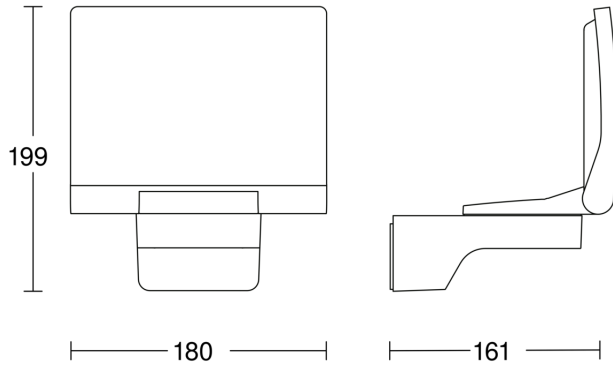

## Master/slave interconnection circuit diagram

