

LED floodlight without sensor - Professional Line

XLED PRO 240 M

V2 Anthracite

EAN 4007841 068080

Article number 068080



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP44



networkable via cable



energy saving

5 years

manufacturer's warranty
steinel-professional.de/garantie



ENEC 05



KEMA KEUR



Light source not exchangeable

Function description

Day-bright illumination throughout: the XLED PRO 240 M outdoor floodlight without motion detector. With fully swivelling LED flat panel and opal diffuser. 2124 lm, 3000 K, 19,3 W. Available in black, white and anthracite. Includes corner wall mount.

Technical specifications

Dimensions (L x W x H)	161 x 180 x 199 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	19,3 W
Interconnection	No
Luminous flux	2124 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (25 °C)	> 60000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)
With motion detector	No
Basic light level function	No

Main light adjustable	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	HCMC
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Includes corner wall mount	Yes
PU1, net weight	0,64 kg
Version	Anthracite
PU1, EAN	4007841068080

LED floodlight without sensor - Professional Line

XLED PRO 240 M


V2 Anthracite

EAN 4007841 068080

Article number 068080



Dimension Drawing

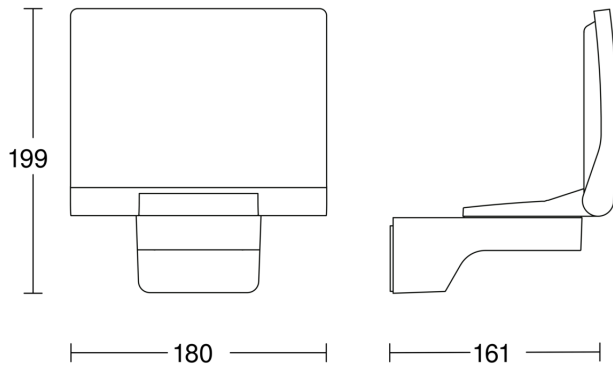

Master/slave interconnection circuit diagram

