

# Dual HF

COM1 - in-ceiling installation  
 EAN 4007841 079482  
 Article number 079482



Hochfrequenz  
Sensor 360°



Max. 20 x 3 m

2000 W

2000 W Max. (LED-fähig)



IP20



Ideal 2,5 - 3,5 m



Innen-  
Bewegungsmelder

iQ

iQ-mode

Teach

Teach mode



Energie sparen

5 years

Herstellergarantie  
steinel-  
professional.de/  
garantie

## Function description

Twice as vigilant! High-frequency corridor sensor Presence Control PRO Dual HF COM1 for indoors, ideal for passageways and long corridors, installation height up to 3.5 m, for switching light 'ON' and 'OFF', DUAL-HF technology for detecting radial movement over up to 20 m in two directions, detection regardless of temperature, HF-sensor technology detects movement through glass, wood and stud walls, switches light 'ON' almost instantly.

## Technical specifications

Dimensions (L x W x H)	122 x 120 x 120 mm	HF-system	5,8 GHz
Manufacturer's Warranty	5 years	Detection	also through glass, wood and stud walls
Settings via	Remote control, DIP switches, Potentiometers, Smart Remote	Detection angle	Aisle, 360 °
With remote control	No	Angle of aperture	140 °
Version	COM1 - in-ceiling installation	Sneak-by guard	Yes
PU1, EAN	4007841079482	Capability of masking out individual segments	No
Type	Presence detector	Electronic scalability	Yes
Application, place	Indoors	Mechanical scalability	No
Application, room	corridor / aisle, Indoors	Reach, radial	20 x 3 m (60 m <sup>2</sup> )
Colour	white	Reach, tangential	20 x 3 m (60 m <sup>2</sup> )
Colour, RAL	9010	Transmitter power	< 1 mW
Includes corner wall mount	No	Functions	Normal / test mode, Semi-/fully automatic, Pushbutton / switch mode, Manual ON / ON-OFF
Installation site	ceiling	Twilight setting	10 – 1000 lx
Installation	In-ceiling installation, Ceiling	Time setting	30 s – 30 Min.
IP-rating	IP20		
Ambient temperature	-25 – 55 °C		

# Dual HF

COM1 - in-ceiling installation  
EAN 4007841 079482  
Article number 079482



## Technical specifications

Material	Plastic
Mains power supply	230 V / 50 – 60 Hz
Technology, sensors	High frequency, Light sensor
Mounting height	2,50 – 3,50 m
Mounting height max.	3,50 m
Optimum mounting height	2,8 m

Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	Yes
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Cable
Interconnection, number	max. 10 sensors


## Accessories

EAN 4007841 003036	Control PRO guard cage
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8

# Dual HF


COM1 - in-ceiling installation  
EAN 4007841 079482  
Article number 079482

## Detection Zone




Possible mounting height: 2,50 m - 3,50 m  
Orange: radial and tangential


## Dimension Drawing 1

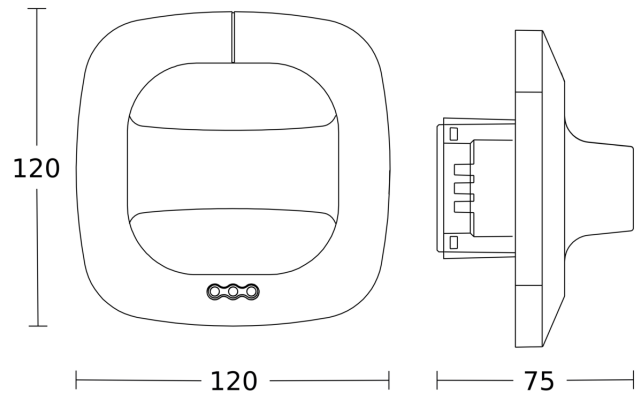

## Dimension Drawing 2

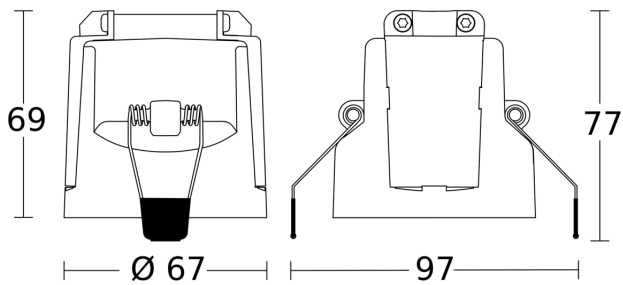


## Master circuit diagram

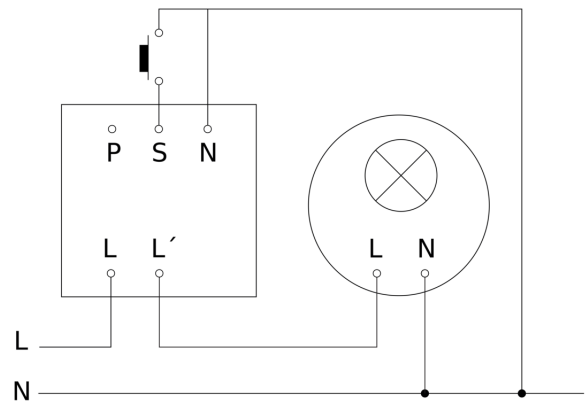

# Dual HF

COM1 - in-ceiling installation  
EAN 4007841 079482  
Article number 079482

## Master/master interconnection circuit diagram

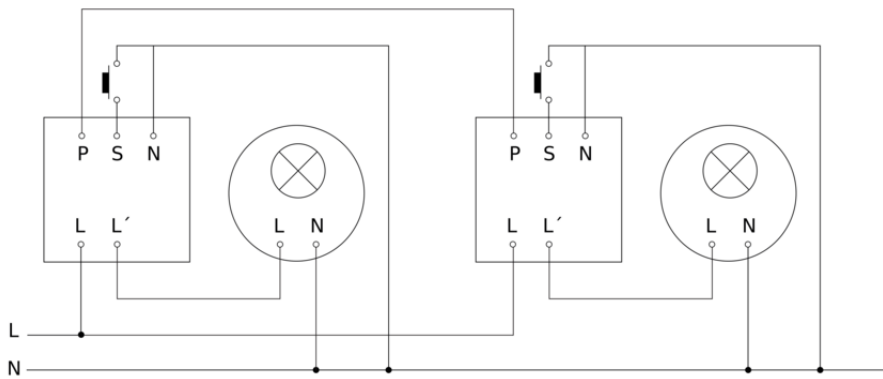

## Master/slave interconnection circuit diagram

