

HF 360

COM1 - in-ceiling installation
 EAN 4007841 079512
 Article number 079512



high frequency sensor 360°



max. Ø 12 m

2000 W

max. 2000 W



IP20



ideal 2,5 - 3,5 m



indoor sensor

iQ

iQ-mode

Teach

Teach mode



energy saving

5 years

manufacturer's warranty steinel.de/garantie

Function description

Doesn't miss a thing. HF-presence detector Presence Control PRO HF 360 COM1 for indoors, ideal for WCs with toilet cubicles, changing rooms, stairwells, multi-storey car parks, kitchens, installation height up to 3.5 m, for switching light 'ON' and 'OFF', 1 – 12 m reach, reach is electronically adjustable and can be limited in two directions, detection regardless of temperature, HF-sensor technology also detects movement through glass, wood and stud walls.

Technical specifications

Dimensions (L x W x H)	94 x 120 x 120 mm	HF-system	5,8 GHz
Manufacturer's Warranty	5 years	Detection	also through glass, wood and stud walls
Settings via	Remote control, DIP switches, Potentiometers, Smart Remote	Detection angle	360 °
With remote control	No	Angle of aperture	140 °
Version	COM1 - in-ceiling installation	Sneak-by guard	Yes
PU1, EAN	4007841079512	Capability of masking out individual segments	Yes
Type	Presence detector	Electronic scalability	Yes
Application, place	Indoors	Mechanical scalability	No
Application, room	function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors	Reach, radial	Ø 12 m (113 m ²)
Colour	white	Reach, tangential	Ø 12 m (113 m ²)
Colour, RAL	9010	Transmitter power	< 1 mW
Includes corner wall mount	No	Functions	Normal / test mode, Semi-/fully automatic, Pushbutton / switch mode, Manual ON / ON-OFF
Installation site	ceiling	Twilight setting	10 – 1000 lx
Package content	1	Time setting	30 s – 30 Min.
Installation	In-ceiling installation, Ceiling		

HF 360

COM1 - in-ceiling installation
EAN 4007841 079512
Article number 079512



Technical specifications

IP-rating	IP20	Basic light level function	No
Ambient temperature	from -25 up to 55 °C	Main light adjustable	No
Material	Plastic	Twilight setting TEACH	Yes
Mains power supply	230 V / 50 – 60 Hz	Constant-lighting control	No
Technology, sensors	High frequency, Light sensor	Interconnection	Yes
Mounting height	2,50 – 3,50 m	Type of interconnection	Master/master, Master/slave
Mounting height max.	3,50 m	Interconnection via	Cable
Optimum mounting height	2,8 m	Product category	Presence detector


Accessories

EAN 4007841 003036	Control PRO guard cage
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8

HF 360


COM1 - in-ceiling installation
EAN 4007841 079512
Article number 079512

Detection Zone

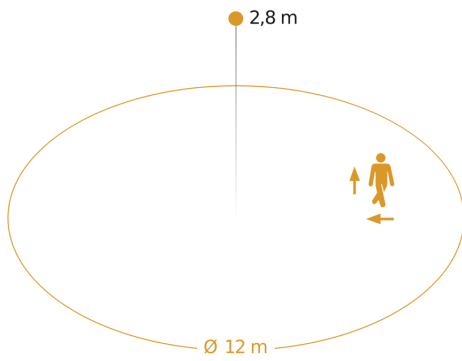


Possible mounting height: 2,50 m - 3,50 m
Orange: radial and tangential


Dimension Drawing 1

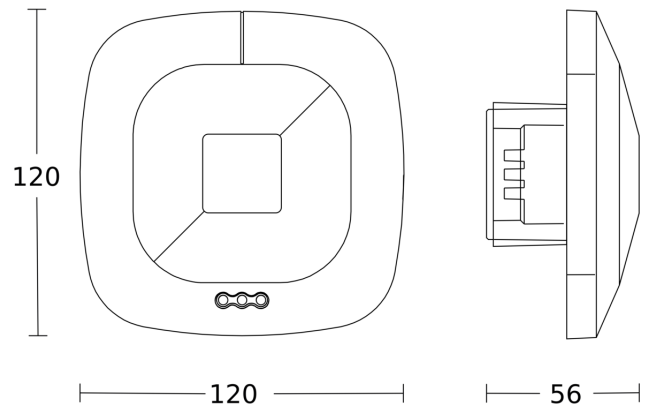

Dimension Drawing 2

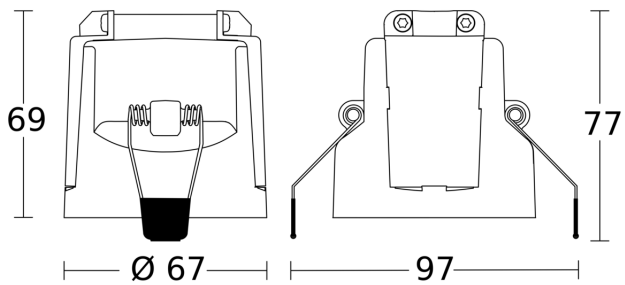


Master circuit diagram

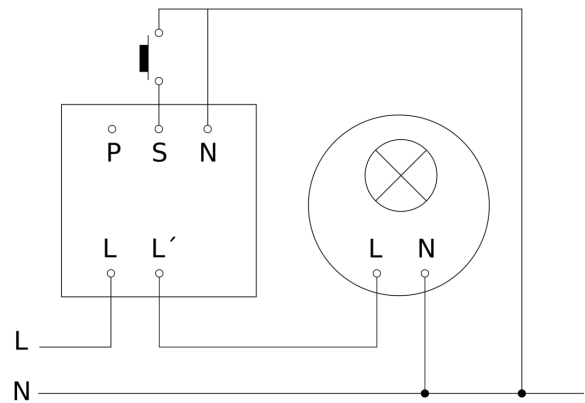

HF 360

COM1 - in-ceiling installation
EAN 4007841 079512
Article number 079512

Master/master interconnection circuit diagram

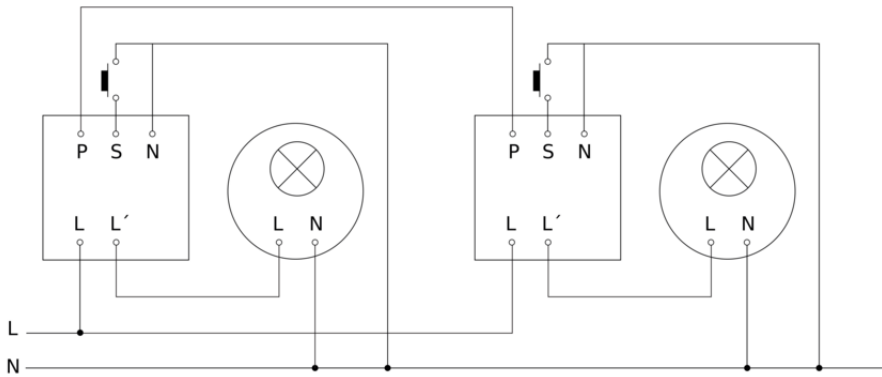

Master/slave interconnection circuit diagram

