

Sensor-switched LED outdoor light

# L 710 S

Anthracite

EAN 4007841 053185

Article number 053185



- 3000 K  
3000K  
warm-white
- infrared sensor  
360°
- max. 8 m
- IP44
- 2 - 2000 lux
- 5 sec - 15 min
- soft light start
- 10%  
10% basic  
brightness
- 4h  
manual override  
4h
- energy saving

## Function description

Luminous design at the height of the times. The L 710 S outdoor luminaire scores with its groundbreaking design. The futuristic shape of the luminaire in combination with the elegant light pattern creates a unique light image. The warm white light (3000 K) harmoniously rounds off the sculptural overall appearance. The L 710 S outdoor luminaire is equipped with an intelligent 360° infrared sensor and has four sensor programmes including night light functions and soft light start. In continuous light mode, the L 710 S shines for four hours. With the LN 710 S, a second version without motion detector is available. This version is equipped with a twilight switch and offers automatic lighting at night as well as an optional night economy mode.

# L 710 S


Anthracite  
 EAN 4007841 053185  
 Article number 053185

## Technical specifications

Dimensions (L x W x H)	140 x 260 x 77 mm
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	Nein
Version	Anthracite
PU1, EAN	4007841053185
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony
Colour	Anthracite
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	5 - 25 W
Mounting height max.	2,50 m
Slave modeselectable	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No

Mechanical scalability	No
Reach, radial	r = 2 m (13 m <sup>2</sup> )
Reach, tangential	r = 8 m (201 m <sup>2</sup> )
Photo-cell controller	Yes
Cover material	sticker
Luminous flux total product	729 lm
Measured luminous flux (360°)	729 lm
Total product efficiency	88 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 60000 h
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Continuous light	selectable, 4h
Functions	4 programme settings geared to practical needs, can be selected on removable sensor module
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Twilight setting TEACH	No
Interconnection	No

## Detection Zone

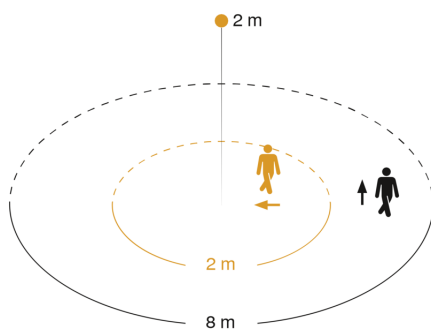

Mögliche Montagehöhe: 1,80 m – 2,50 m  
 Orange: radial  
 Schwarz: tangential

## Dimension Drawing

