

LED floodlight without sensor - Professional Line

# XLED PRO 240

V2 Anthracite

EAN 4007841 068080

Article number 068080



LED

3000 K



IP44



networkable via  
cable



energy saving

5 years

manufacturer's  
warranty steinel-  
professional.de/  
garantie

CE

CE



Light source not  
exchangeable



Control gear not  
exchangeable



ENEC 05

## Function description

Day-bright illumination throughout: the XLED PRO 240 outdoor floodlight without motion detector. With fully swivelling LED flat panel and opal diffuser. 2124 lm, 3000 K, 19,3 W. Available in black, white and anthracite.

## Technical specifications

Dimensions (L x W x H)	161 x 180 x 199 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	Anthracite
PU1, EAN	4007841068080
Application, place	Outdoors
Application, room	outdoors, all round the building, terrace / balcony, courtyard & driveway
Includes corner wall mount	No
Installation site	wall, corner
Installation	Wall, corner, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	HCMC

Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	2124 lm
Measured luminous flux (360°)	2124 lm
Total product efficiency	110 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)
Soft light start	No
Basic light level function	No
Main light adjustable	No
Interconnection	No
Output	19,3 W
Colour Rendering Index CRI	= 82
Product category	LED floodlight without sensor
Energieeffizienzklasse Lichtquelle	E

<https://www.steinel.de>

Subject to technical modifications

01.2025 Page 1 from 2

# XLED PRO 240

V2 Anthracite

EAN 4007841 068080

Article number 068080




## Technical specifications

Cover material

Plastic, opal

## Dimension Drawing

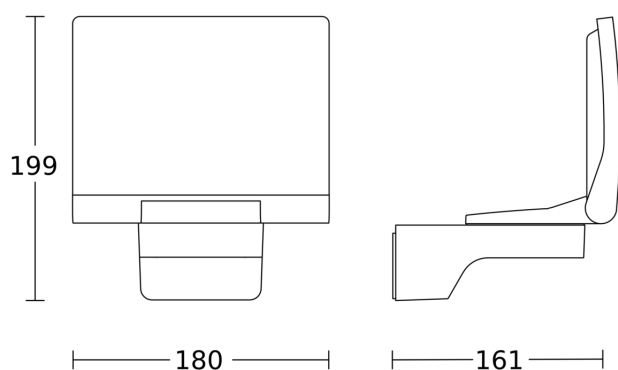

## Master/slave interconnection circuit diagram

