

XLED PRO ONE S

with motion detector - anthracite

EAN 4007841 069568

Article number 069568



LED

long life LED 50.000 h

3000 K

3000K warm-white

infrared sensor
240°

max. Ø 10 m



IP44



180° vertical



2 - 2000 lux

Light source not
exchangeableControl gear not
exchangeable

8 sec - 35 min

Function description

Floodlight redefined. The XLED PRO ONE S floodlight, which can be swivelled vertically through 180° and comes in an elegant aluminium housing, guarantees daylight illumination of large areas with warm white 3000 K and at. Features include a 240° infrared sensor (10 m range), plug-in cover caps to limit the detection area, a basic light function (10%) and an optional surface-mounted adapter. Networking via cable. Adjustment via potentiometers and remote control. RC 12 remote control included for sensor version. Maximum mounting height: 6 m. Available in white or anthracite. 5-year guarantee.

Technical specifications

Dimensions (L x W x H)	182 x 229 x 230 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Remote control, Potentiometers, Smart Remote
Version	with motion detector - anthracite
PU1, EAN	4007841069568
Application, place	Outdoors
Application, room	outdoors, garden, front door, courtyard & driveway, all round the building, Indoors
Colour	Anthracite
Includes corner wall mount	No
Installation site	ceiling, wall
Installation	Surface wiring, Wall
Impact resistance	IK03

Photo-cell controller	Yes
Cover material	shrouds
Luminous flux total product	2204 lm
Measured luminous flux (360°)	2204 lm
Total product efficiency	120 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 36000 h
LED cooling system	Passive Thermo Control
Soft light start	Yes
Functions	DIM function, Light sensor, Motions sensor, Orientation light
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Basic light level function	Yes

XLED PRO ONE S

with motion detector - anthracite

EAN 4007841 069568

Article number 069568



Technical specifications

IP-rating	IP44
Protection class	I
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Mains power supply	220 – 240 V / 50 – 60 Hz
LED lamps < 2 W	16 W
LED lamps > 2 W < 8 W	64 W
LED lamps > 8 W	64 W
Capacitive load in µF	88 µF
Mounting height max.	6,00 m
Slave modeselectable	No
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (19 m ²)
Reach, tangential	r = 10 m (209 m ²)

Basic light level function time	10/30 min, all night
Main light adjustable	No
Twilight setting TEACH	Yes
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	Cable
Basic light level function in per cent	10 %
Basic light level function percentage, from	10 %
Basic light level function percentage, up to	10 %
Output	18,4 W
Colour Rendering Index CRI	= 80
Optimum mounting height	2 m
Detection angle	240 °
IP-rating, ceiling	IP44
Product category	Sensor-switched LED floodlight
Energieeffizienzklasse Lichtquelle	E

Accessories

EAN 4007841 080990	Surface mount adapter XLED PRO ONE
EAN 4007841 079000	RC 12

XLED PRO ONE S


with motion detector - anthracite

EAN 4007841 069568

Article number 069568



Detection Zone

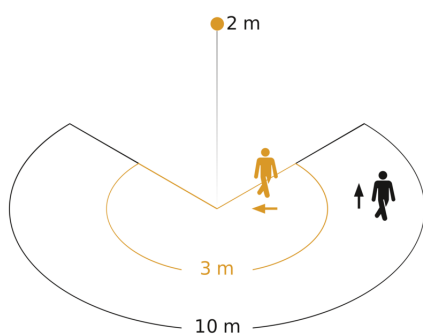


Possible mounting height: 1,80 m - 6,00 m


Orange: radial

Black: tangential

Dimension Drawing

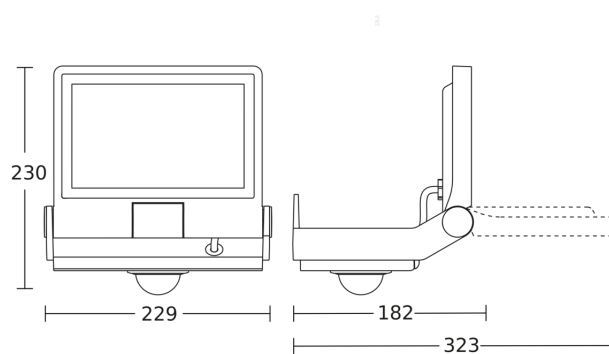

Master circuit diagram

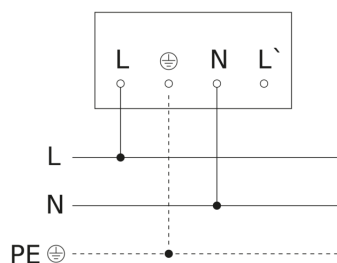

Master/slave interconnection circuit diagram

