

GL 85 C 600

without motion detector
 EAN 4007841 078652
 Article number 078652



LED

3000 K



Außenleuchte



IP44



Softlichtstart



0 - 100% Grundlicht



0 - 100% Hauptlicht



Lichtquelle nicht austauschbar



Betriebsgerät nicht austauschbar



Vernetzbar via Bluetooth

36 Jahre (Ø 4,5 Std / Tag)

3000K warmweiß

Function description

Connected Lighting - Completes an object with intelligent light in the outdoor area. High-quality aluminium path luminaire GL 85 C 600 in cubic design and 60 cm height. With 719 lm at 9 W (3000 K). Time-saving wireless commissioning, setting and networking via Bluetooth Mesh and Connect App. Adjustable main light (0-100%). Further functions possible in combination with a sensor version.

Technical specifications

Dimensions (L x W x H)	136 x 146 x 600 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	5 years
Settings via	App, Smartphone, Connect Bluetooth Mesh
With remote control	No
Version	without motion detector
PU1, EAN	4007841078652
Application, place	Outdoors
Application, room	outdoors, garden
includes sheet of self-adhesive numbers	No
Installation site	Stand mounted
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium

Photo-cell controller	Yes
Luminous flux total product	719 lm
Measured luminous flux (360°)	719 lm
Total product efficiency	79,9 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B50
Base	without
Soft light start	Yes
Functions	Neighbouring group function, Motions sensor
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Type of interconnection	Master/slave

LED outdoor light without sensor - Professional Line

GL 85 C 600

without motion detector
EAN 4007841 078652
Article number 078652




Technical specifications


Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	9 W

Interconnection via	Bluetooth Mesh Connect
Colour Rendering Index CRI	= 82

Dimension Drawing

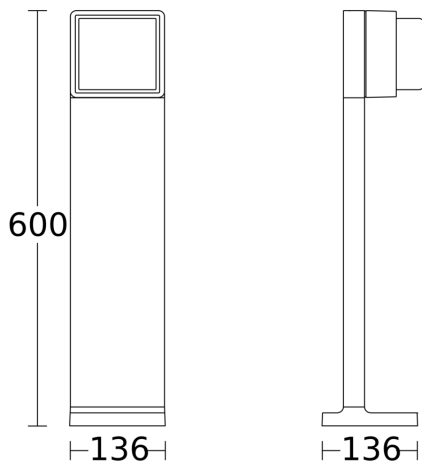

Circuit diagram Bluetooth



Circuit diagram Bluetooth

