

LED outdoor light without sensor - Professional Line

GL 85 C 900

without motion detector
EAN 4007841 078676
Article number 078676



LED

3000 K



36 Jahre (Ø 4,5 Std / Tag)

3000K warmweiß

Außenleuchte

IP44

0 - 100% Grundlicht

0 - 100% Hauptlicht

Softlichtstart

Lichtquelle nicht austauschbar

Betriebsgerät nicht austauschbar

Vernetzbar via Bluetooth

Function description

Connected Lighting - Completes an object with intelligent light in the outdoor area. High-quality aluminium path luminaire GL 85 C 900 in cubic design and 90 cm height. With 719 lm at 9 W (3000 K). Time-saving wireless commissioning, setting and networking via Bluetooth Mesh and Connect App. Adjustable main light (0-100%). Further functions possible in combination with a sensor version.

Technical specifications

Dimensions (L x W x H)	136 x 146 x 900 mm	Photo-cell controller	Yes
With lamp	Yes, STEINEL LED system	Luminous flux total product	719 lm
Manufacturer's Warranty	5 years	Measured luminous flux (360°)	719 lm
Settings via	App, Smartphone, Connect Bluetooth Mesh	Total product efficiency	79,9 lm/W
With remote control	No	Colour temperature	3000 K
Version	without motion detector	Colour variation LED	SDCM3
PU1, EAN	4007841078676	Lamp	LED cannot be replaced
Application, place	Outdoors	Service life LED L70B50 (25°)	> 60000 h
Application, room	outdoors, garden	Drop in luminous flux in accordance with LM80	L70B50
includes sheet of self-adhesive numbers	No	Base	without
Installation site	Stand mounted	Soft light start	Yes
Impact resistance	IK03	Functions	Motions sensor, Neighbouring group function
IP-rating	IP44	Main light adjustable	0 - 100 %
Protection class	I	Twilight setting TEACH	Yes
Ambient temperature	-20 – 40 °C	Interconnection	Yes
Housing material	Aluminium	Type of interconnection	Master/slave

<https://www.steinel.de>

Subject to technical modifications

07.2024 Page 1 from 2

LED outdoor light without sensor - Professional Line

GL 85 C 900

without motion detector
EAN 4007841 078676
Article number 078676




Technical specifications


Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	9 W

Interconnection via	Bluetooth Mesh Connect
Colour Rendering Index CRI	= 82

Dimension Drawing

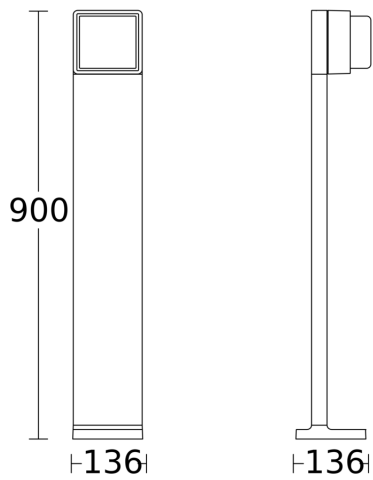

Circuit diagram Bluetooth



Circuit diagram Bluetooth

