


# RS PRO P1 S

V3 Neutral white  
 EAN 4007841 056032  
 Article number 056032

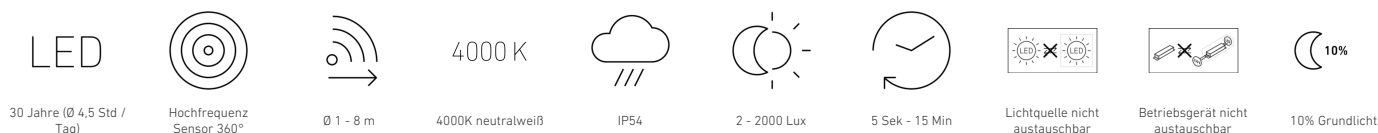

## Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect switched indoor light . The RS PRO P1 S integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and unbeatable efficiency. In addition, two metal plates are always included to further limit the sensor to certain directions. As many as ten lights can be interconnected by cable. Output: 9,4 W with 980 lm, 4000 K.

## Technical specifications

Dimensions (Ø x H)	280 x 110 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	5 years
Version	Neutral white
PU1, EAN	4007841056032
Colour	white
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz

Soft light start	Yes
Continuous light	selectable, 4h
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Interconnection	Yes
Interconnection via	Cable
Lifetime LED according to IEC-62717 (L70)	100.000 h
Lifetime LED according to IEC-62717 (L80)	73.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lifetime LED according to IES TM-21 (L80)	>60.000 h
Fuse protection B10	54
Fuse protection B16	87

# RS PRO P1 S

V3 Neutral white  
 EAN 4007841 056032  
 Article number 056032



## Technical specifications

Mounting height max.	4,00 m
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m <sup>2</sup> )
Reach, tangential	Ø 8 m (50 m <sup>2</sup> )
Luminous flux total product	980 lm
Total product efficiency	104 lm/W
Colour temperature	4000 K
Lamp	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control


Fuse protection C10	90
Fuse protection C16	145
Switching output 1, low-voltage halogen lamps	800 VA
LED lamps > 8 W	250 W
Capacitive load in µF	88 µF
Basic light level function in per cent	10 %
Output	9,4 W
Colour Rendering Index CRI	= 82
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	13 A
IP-rating, ceiling	IP54
Detection angle	360 °

# RS PRO P1 S

V3 Neutral white  
 EAN 4007841 056032  
 Article number 056032




## Detection Zone

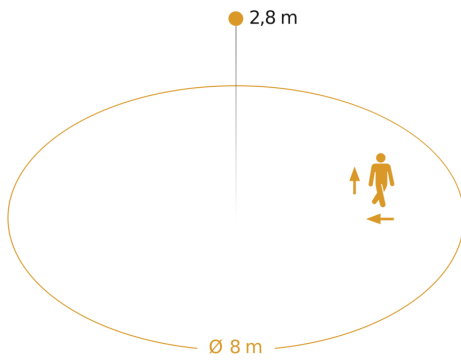


Possible mounting height: 2,00 m - 4,00 m  
 Orange: radial and tangential

## Dimension Drawing

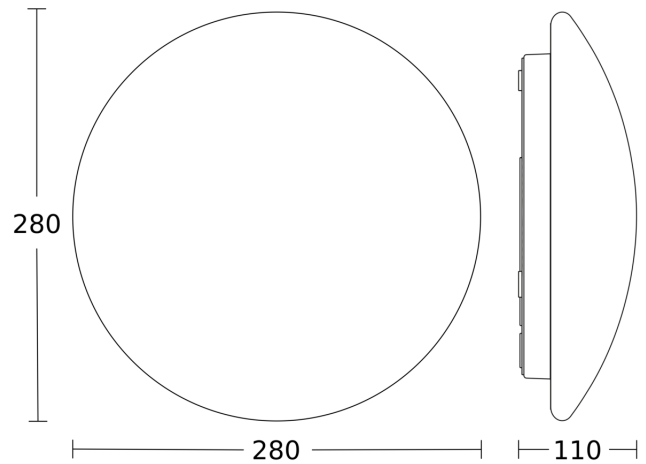


## Light Distribution Curve



<b>Output</b>	9,4 W
<b>With lamp</b>	Yes, STEINEL LED system
<b>Lamp</b>	LED cannot be replaced
<b>Measured luminous flux (360°)</b>	980 lm
<b>Colour temperature</b>	4000 K
<b>LED life expectancy (max. °C)</b>	50000 h
<b>LED cooling system</b>	Passive Thermo Control

## Master circuit diagram




# RS PRO P1 S

V3 Neutral white  
EAN 4007841 056032  
Article number 056032



**Master/master interconnection circuit diagram**

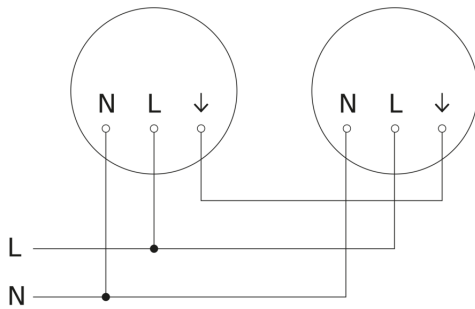

**Master/slave interconnection circuit diagram**

