


LED floodlight without sensor

XLED ONE

white

EAN 4007841 065218

Article number 065218

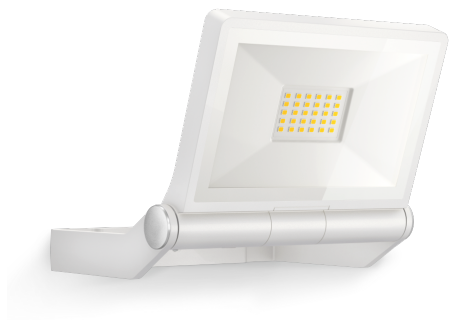

LED

long life LED 50.000 h

3000 K

3000K warm-white



IP44



180° vertical



ideal 2 m



Indoor/Outdoor



Light source not exchangeable



Control gear not exchangeable

3 years

manufacturer's warranty steinel.de/garantie



CE

Function description

LED floodlight for wall and ceiling. The XLED ONE features modern LED technology and warm white light at 3000 K and 2050 lm with a power consumption of 17,8 W. The aluminium panel can be swivelled vertically by 180°. The reflector provides bright illumination. The LEDs achieve a lifetime of up to 50,000 hours – equivalent to approx. 30 years with a daily use of 4.5 hours.

Technical specifications

Dimensions (L x W x H)	173 x 229 x 195 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	3 years
Version	white
PU1, EAN	4007841065218
Application, place	Outdoors
Application, room	outdoors, all round the building, courtyard & driveway
Colour	white
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium

Photo-cell controller	No
Luminous flux total product	2050 lm
Measured luminous flux (360°)	2050 lm
Total product efficiency	115 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 36000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Basic light level function	No
Interconnection	No
Output	17,8 W
Colour Rendering Index CRI	= 80
Product category	LED floodlight without sensor

<https://www.steinel.de>

Subject to technical modifications

08.2026 Page 1 from 2

LED floodlight without sensor

XLED ONE

white

EAN 4007841 065218

Article number 065218




Technical specifications

Cover material	Glass transparent
Mains power supply	220 – 240 V / 50 – 60 Hz

Energy efficiency class of light source E

Dimension Drawing

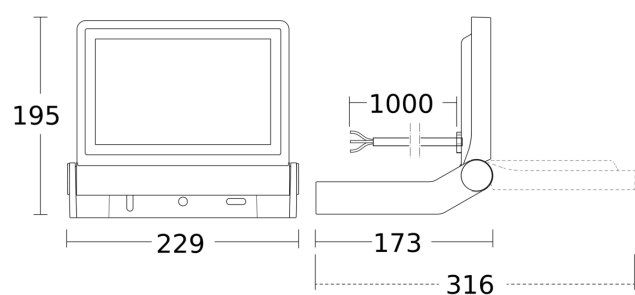

Circuit diagram

