


LED floodlight without sensor

XLED ONE XL

Anthracite

EAN 4007841 065225

Article number 065225

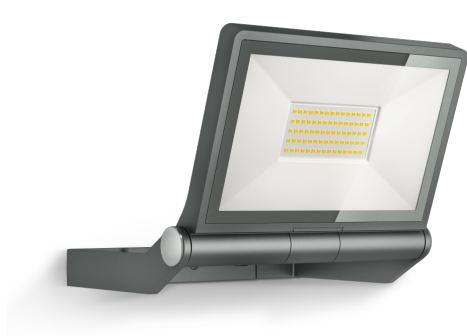

LED

long life LED 50.000 h

3000 K

3000K warm-white



IP44



180° vertical



Indoor/Outdoor

3 years

manufacture's
warranty steinel.de/
garantie



Light source not
exchangeable



Control gear not
exchangeable



CE

Function description

Powerful light for large areas. The XLED ONE XL with an output of 42,6 W provides warm white light at 3000 K and 4200 lm. The wall and ceiling floodlight can be swivelled vertically by 180°. The LEDs achieve a lifetime of up to 50,000 hours – equivalent to approx. 30 years with a daily use of 4.5 hours. IP44 protection.

Technical specifications

Dimensions (L x W x H)	193 x 259 x 215 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	3 years
Version	Anthracite
PU1, EAN	4007841065225
Application, place	Outdoors
Application, room	outdoors, courtyard & driveway
Colour	Anthracite
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	Glass transparent

Mains power supply	220 – 240 V / 50 – 60 Hz
Photo-cell controller	No
Luminous flux total product	4200 lm
Measured luminous flux (360°)	4200 lm
Total product efficiency	99 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 36000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Basic light level function	No
Interconnection	No
Output	42,6 W
Colour Rendering Index CRI	= 80

<https://www.steinel.de>

Subject to technical modifications

08.2026 Page 1 from 2

LED floodlight without sensor

XLED ONE XL

Anthracite

EAN 4007841 065225


Article number 065225



Product category

LED floodlight without sensor

Dimension Drawing

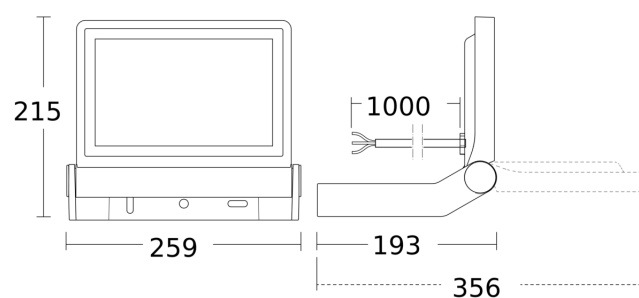

Circuit diagram

