

Sensor-switched LED floodlight

XLED ONE XL S

Anthracite

EAN 4007841 065263

Article number 065263



LED

long life LED 50.000 h

3000 K

3000K warm-white



infrared sensor 180°



max. Ø 12 m



IP44



180° vertical



180° vertical



Light source not exchangeable



Control gear not exchangeable



2 - 1000 lux

Function description

Powerful light. Automatically controlled. The XLED ONE XL S wall and ceiling floodlight can be swivelled vertically by 180° and provides bright, warm white light around the home. In figures: 3000 K and 4200 lm with an output of 42,6 W. With infrared sensor, 180° angle of coverage, a range of up to 12 m, twilight setting from 2 to 1000 lux and time setting from 5 s to 35 min. IP44 protection.

Technical specifications

Dimensions (L x W x H)	222 x 259 x 215 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	Anthracite
PU1, EAN	4007841065263
Application, place	Outdoors
Application, room	outdoors, courtyard & driveway
Colour	Anthracite
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium

Reach, radial	r = 3 m (14 m ²)
Reach, tangential	r = 12 m (226 m ²)
Photo-cell controller	Yes
Luminous flux total product	4200 lm
Measured luminous flux (360°)	4200 lm
Total product efficiency	99 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 36000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Twilight setting	2 - 1000 lx
Time setting	5 s - 35 Min.
Basic light level function	No

<https://www.steinel.de>

Subject to technical modifications

08.2026 Page 1 from 3

Sensor-switched LED floodlight

XLED ONE XL S

Anthracite

EAN 4007841 065263

Article number 065263



Technical specifications

Cover material	Glass transparent
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	3,00 m
Sneak-by guard	No
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No

Main light adjustable	No
Interconnection	No
Output	42,6 W
Colour Rendering Index CRI	= 80
Optimum mounting height	2 m
Detection angle	180 °
Product category	Sensor-switched LED floodlight

Sensor-switched LED floodlight

XLED ONE XL S


Anthracite

EAN 4007841 065263

Article number 065263



Detection Zone

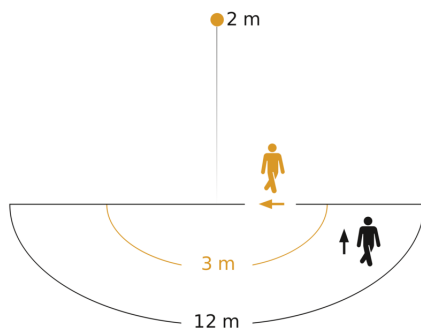


Possible mounting height: 1,80 m - 3,00 m

Orange: radial

Black: tangential

Dimension Drawing

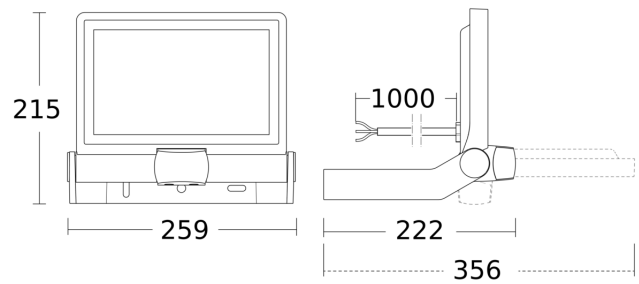

Circuit diagram

