

Sensor-switched LED indoor light

RS 16 S

Glass
EAN 4007841 035105
Article number 035105



LED

30 Jahre (Ø 4,5 Std / Tag)

3000 K

3000K warmweiß



Infrarot-Sensor
360°



Ø 3 - 8 m



IP44



2 - 2000 Lux



5 Sek - 15 Min



Manuelle
Übersteuerung 4
Std



Vernetzbar via Kabel



Innenleuchte

Function description

Evolution of a classic. RS 16 S sensor-switched indoor light, ideal for corridors, hallways, stairwells and bathrooms. Integrated high-frequency sensor with 360° coverage, 3-8 m reach all round. The latest LED technology, 918 lm at a consumption of only 9,3 W. Adjustable time and twilight threshold.

RS 16 S

Glass
 EAN 4007841 035105
 Article number 035105



Technical specifications


Dimensions (Ø x H)	273 x 96 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Version	Glass
PU1, EAN	4007841035105
Application, place	Indoors
Application, room	corridor / aisle, function room / ancillary room, stairwell, WC / washroom, outdoors, Indoors
Colour	white
includes sheet of self-adhesive numbers	No
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Glass
Cover material	Glass opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,38 W
Mounting height max.	4,00 m
HF-system	5,8 GHz
Slave modeselectable	No
Detection	also through glass, wood and stud walls
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No

Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 8 m (50 m ²)
Photo-cell controller	Yes
Transmitter power	< 1 mW
Luminous flux total product	918 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control
Soft light start	No
Continuous light	selectable, 4h
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Twilight setting TEACH	No
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Cable
Fuse protection B10	54
Fuse protection B16	87
Fuse protection C10	90
Fuse protection C16	145
Basic light level function in per cent	10 %
Output	9,3 W
Angle of aperture	160 °
IP-rating, ceiling	IP44
Detection angle	360 °

RS 16 S


Glass
EAN 4007841 035105
Article number 035105

Detection Zone

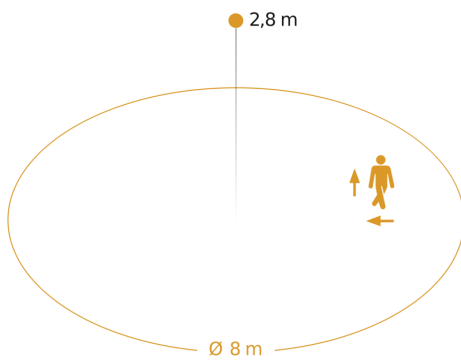


Possible mounting height: 2,00 m - 4,00 m
Orange: radial and tangential


Dimension Drawing

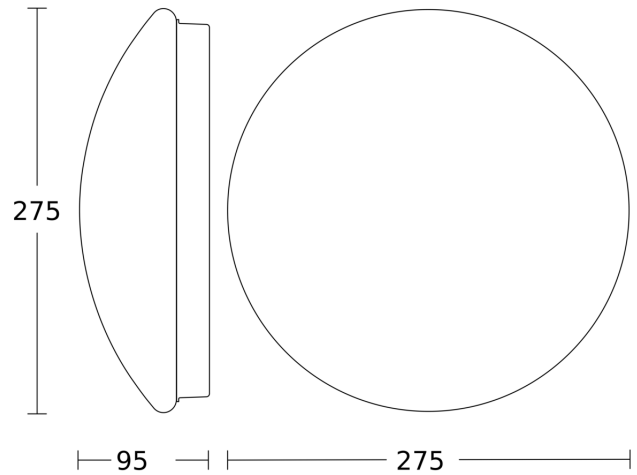

Circuit diagram



Master circuit diagram



Sensor-switched LED indoor light

RS 16 S

Glass
EAN 4007841 035105
Article number 035105



Master/master interconnection circuit diagram

