

Floodlight without sensor

# LS 150

black

EAN 4007841 069216

Article number 069216



LED

30 years (l 4,5h / day)

4000 K

4000K neutral white



IP44

3 years

manufacturer's  
warranty steinel.de/  
garantie



CE



energy saving



CE



Light source not  
exchangeable



Control gear not  
exchangeable

## Function description

Beautiful. Bright. Ideal for courtyards and driveways: the LS 150 spotlight without sensor. Neutral white light (4,000 K), {luminous flux}, 14,7 W. Adjustable 80° horizontally and 150° vertically. The spotlight is switched on and off manually by a switch. Protection class IP 44. Colour version: black and white.

# LS 150

black

EAN 4007841 069216


Article number 069216

## Technical specifications

Dimensions (L x W x H)	178 x 157 x 178 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	3 years
Version	black
PU1, EAN	4007841069216
Application, place	Outdoors
Application, room	garden, front door, courtyard & driveway, multi-storey / underground car park, all round the building, terrace / balcony
Colour	black
Includes corner wall mount	No
Installation site	wall
Installation	Surface wiring, Wall, corner
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	from -10 up to 30 °C
Housing material	Aluminium
Cover material	Glass transparent

Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	1375 lm
Measured luminous flux (360°)	1486 lm
Total product efficiency	94 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 36000 h
LED cooling system	Passive Thermo Control
Soft light start	No
Basic light level function	No
Main light adjustable	No
Interconnection	No
Output	14,7 W
Colour Rendering Index CRI	= 80
Product category	Floodlight without sensor
Energieeffizienzklasse Lichtquelle	E

## Dimension Drawing

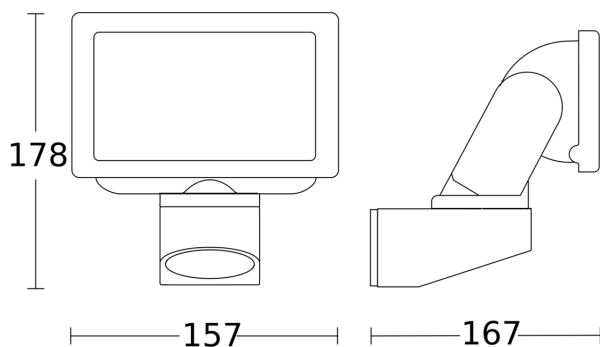

## Circuit diagram

