

LED floodlight without sensor

# LS 300

black  
EAN 4007841 069230  
Article number 069230



LED

30 Jahre (Ø 4,5 Std / Tag)

4000 K

4000K neutralweiß



IP44



Energie sparen



Plastikfreie Verpackung

3 years

Herstellergarantie



CE

## Function description

Extra-powerful illumination. The LS 300 LED floodlight perfectly illuminates entrances and courtyard entries with neutral white light (4,000 K). And for this, it needs just 29,5 W at 2962 lm. The floodlight can be adjusted through 80° horizontally and 150° vertically. Available in black or white. Protection class: IP 44.

## Technical specifications

Dimensions (L x W x H)	184 x 213 x 218 mm	Mains power supply	220 – 240 V / 50 – 60 Hz
With lamp	Yes, STEINEL LED system	Luminous flux total product	2704 lm
With motion detector	No	Measured luminous flux (360°)	2962 lm
Manufacturer's Warranty	3 years	Total product efficiency	92 lm/W
Version	black	Colour temperature	4000 K
PU1, EAN	4007841069230	Colour variation LED	SDCM6
Application, place	Outdoors	Lamp	LED cannot be replaced
Application, room	outdoors, garden, courtyard & driveway, multi-storey / underground car park, all round the building, terrace / balcony	LED life expectancy (max. °C)	50000 h
Colour	black	Service life LED L70B50 (25°)	> 36000 h
Includes corner wall mount	No	Drop in luminous flux in accordance with LM80	L70B50
Installation site	wall	LED cooling system	Passive Thermo Control
Installation	Wall, Surface wiring	Soft light start	No
Impact resistance	IK03	Basic light level function	No
IP-rating	IP44	Main light adjustable	No
Protection class	I	Interconnection	No
		Output	29,5 W

<https://www.steinel.de>

Subject to technical modifications

04.2024 Page 1 from 2

LED floodlight without sensor

# LS 300

black  
EAN 4007841 069230  
Article number 069230




## Technical specifications

Ambient temperature	-10 – 30 °C
Housing material	Aluminium
Cover material	Glass transparent

Colour Rendering Index CRI = 80

## Dimension Drawing

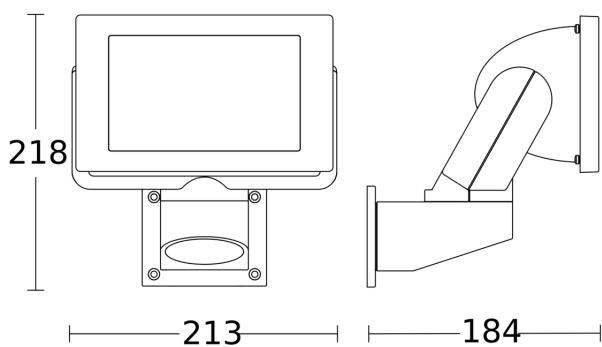

## Circuit diagram

