

Outdoor light without sensor

L 835 C

without motion detector, with Bluetooth
EAN 4007841 079260
Article number 079260



LED

3000 K



IP44



2 - 2000 Lux



5 Sek - 60 Min



Softlichtstart



Manuelle
Übersteuerung 4
Std



Lichtquelle nicht
austauschbar



Betriebsgerät nicht
austauschbar



Energie sparen

30 Jahre (Ø 4,5 Std /
Tag)

3000K warmweiß

Function description

State-of-the-art light cubes. The cubic L 835 C LED outdoor light without sensor sets every external home wall perfectly in scene with its elegant look and warm white LED light (3,000 K) and 616 lm. Ideal for terraces, home entrances and facades. Several lights can be interconnected to form light groups via app. If a sensor-controlled light is included, all lights switch ON automatically as soon as movement is detected. Colour: Anthracite.

Technical specifications

Dimensions (L x W x H)	110 x 110 x 110 mm
Dimensions (Ø x H)	132 x 110 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
Settings via	Connect Bluetooth Mesh, Smartphone, Tablet
With remote control	No
Version	without motion detector, with Bluetooth
PU1, EAN	4007841079260
Application, place	Outdoors
Application, room	outdoors, garden, front door, courtyard & driveway, all round the building, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Installation site	wall
Impact resistance	IK03

Output	9,1 W
Photo-cell controller	No
Luminous flux total product	616 lm
Measured luminous flux (360°)	616 lm
Total product efficiency	68 lm/W
Colour temperature	3000 K
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 60000 h
Base	without
LED cooling system	Passive Thermo Control
Soft light start	No
Continuous light	selectable
Basic light level function	No
Main light adjustable	0 - 100 %
Twilight setting TEACH	No
Interconnection	Yes

<https://www.steinell.de>

Subject to technical modifications

04.2024 Page 1 from 2

Outdoor light without sensor

L 835 C

without motion detector, with Bluetooth
EAN 4007841 079260
Article number 079260




Technical specifications


IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz

Interconnection via	Bluetooth Mesh Connect
Colour Rendering Index CRI	= 82

Dimension Drawing

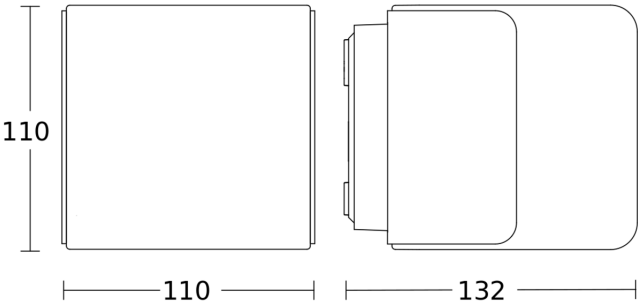

Light Distribution Curve



Output	9,1 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	616 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control