

LED floodlight without sensor

# XLED home 2

V2 graphite

EAN 4007841 033095

Article number 033095



LED

30 years (0 4,5h / day)

3000 K

3000K warm-white



IP44



180° horizontal,  
180° vertikal



networkable via  
cable



energy saving

5 years

manufacturer's  
warranty steinel.de/  
garantie



Light source not  
exchangeable



Control gear not  
exchangeable



CE

## Function description

Dazzlingly stylish LED floodlight. XLED home 2 – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1550 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

## Technical specifications

Dimensions (L x W x H)	161 x 180 x 181 mm	Mains power supply	220 – 240 V / 50 – 60 Hz
With lamp	Yes, STEINEL LED system	Photo-cell controller	No
With motion detector	No	Luminous flux total product	1550 lm
Manufacturer's Warranty	5 years	Measured luminous flux (360°)	1550 lm
Version	graphite	Total product efficiency	113 lm/W
PU1, EAN	4007841033095	Colour temperature	3000 K
Application, place	Outdoors	Colour variation LED	SDCM3
Application, room	outdoors, all round the building, terrace / balcony, courtyard & driveway	Lamp	LED cannot be replaced
Installation site	wall, corner	LED life expectancy (max. °C)	50000 h
Installation	Surface wiring, corner, Wall	Service life LED L70B50 (25°)	> 60000 h
Impact resistance	IK03	Drop in luminous flux in accordance with LM80	L70B10
IP-rating	IP44	LED cooling system	HCMC (High Conductive Magnesium Composite)
Protection class	II	Output	13,7 W
Ambient temperature	from -20 up to 40 °C	Colour Rendering Index CRI	= 82
Housing material	HCMC	Product category	LED floodlight without sensor
Cover material	Plastic, opal	Energieeffizienzklasse Lichtquelle	E

<https://www.steinel.de>

Subject to technical modifications

05.2025 Page 1 from 2

LED floodlight without sensor

# XLED home 2

V2 graphite  
EAN 4007841 033095  
Article number 033095



## Accessories

EAN 4007841 055875

Corner wall mount XLED home 2/ PRO 240


EAN 4007841 053086

Corner wall mount XLED Home 2/ Pro 240


EAN 4007841 055615

Corner wall mount XLED home 2/ PRO 240

## Dimension Drawing

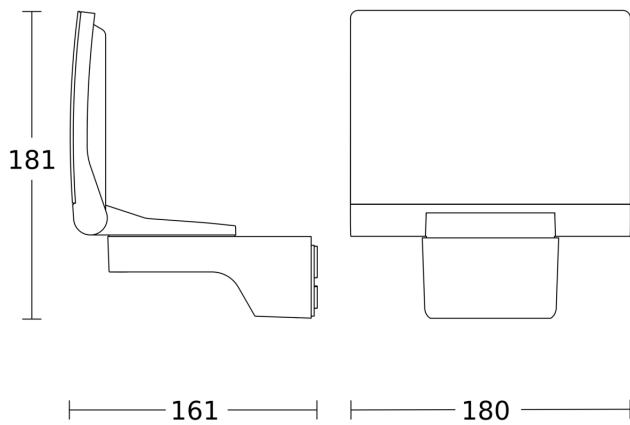

## Light Distribution Curve

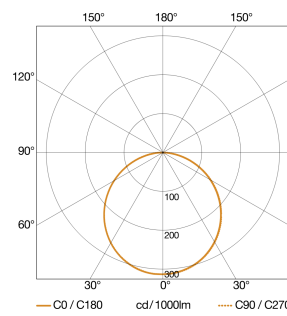

Output	13,7 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	1550 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)

## Slave circuit diagram

