

LED floodlight without sensor

XLED home 2

V2 graphite

EAN 4007841 033095

Article number 033095



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP44



180° horizontal, 180°
vertikal



networkable via cable

5 years

manufacturer's
warranty steinel.de/
garantie



Light source not
exchangeable



Control gear not
exchangeable



CE

Function description

Dazzlingly stylish LED floodlight. XLED home 2 – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1550 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

Technical specifications

Dimensions (L x W x H)	161 x 180 x 181 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	graphite
PU1, EAN	4007841033095
Application, place	Outdoors
Application, room	outdoors, all round the building, terrace / balcony, courtyard & driveway
Colour	Anthracite
Installation site	wall, corner
Installation	Surface wiring, corner, Wall
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	HCMC

Mains power supply	220 – 240 V / 50 – 60 Hz
Photo-cell controller	No
Luminous flux total product	1550 lm
Measured luminous flux (360°)	1550 lm
Total product efficiency	113 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Service life LED L70B50 (25°)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	HCMC (High Conductive Magnesium Composite)
Output	13,7 W
Colour Rendering Index CRI	= 82
Product category	LED floodlight without sensor
Energy efficiency class of light source E	

<https://www.steinel.de>

Subject to technical modifications

08.2026 Page 1 from 3

LED floodlight without sensor

XLED home 2

V2 graphite

EAN 4007841 033095

Article number 033095



Technical specifications

Cover material

Plastic, opal

Accessories

EAN 4007841 055875

Corner wall mount XLED Home 2/ Protect/ Pro 240 black

EAN 4007841 053086

Corner wall mount XLED Home 2/ Protect/ Pro 240/ PRO Expanse graphite

EAN 4007841 055615

Corner wall mount XLED Home 2/ Protect/ Pro 240/ PRO Expanse white


LED floodlight without sensor

XLED home 2


V2 graphite
EAN 4007841 033095
Article number 033095



Dimension Drawing

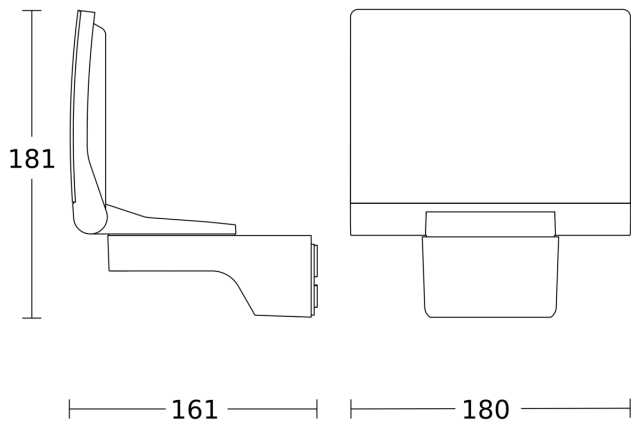

Light Distribution Curve



Output	13,7 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	1550 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)

Slave circuit diagram

