#### LED floodlight without sensor

# XLED home 2

V2 white EAN 4007841 033125 Article number 033125







3000 K









5 years







30 years (Ø 4,5h / day)

3000K warm-white

IP44

180° horizontal 180° vertikal

manufacturer's warranty steinel.de/ garantie

Control gear not exchangeable

CE

### **Function description**

Dazzlingly stylish LED floodlight. XLED home 2 – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1550 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

### **Technical specifications**

| Dimensions (L x W x H)  | 161 x 180 x 181 mm  |
|-------------------------|---|
| With lamp               | Yes, STEINEL LED system   |
| With motion detector    | No  |
| Manufacturer's Warranty | 5 years   |
| Version                 | white   |
| PU1, EAN                | 4007841033125   |
| Application, place      | Outdoors  |
| Application, room       | outdoors, all round the building,<br>terrace / balcony, courtyard &<br>driveway |
| Installation site       | wall, corner  |
| Installation            | Surface wiring, corner, Wall  |
| Impact resistance       | IK03  |
| IP-rating               | IP44  |
| Protection class        | II  |
| Ambient temperature     | from -20 up to 40 °C  |
| Housing material        | HCMC  |
| Cover material          | Plastic, opal   |

| Mains power supply                            | 220 – 240 V / 50 – 60 Hz                      |
|---|---|
| Photo-cell controller                         | No  |
| Luminous flux total product                   | 1550 lm                                       |
| Measured luminos flux (360°)                  | 1550 lm                                       |
| Total product efficiency                      | 113 lm/W                                      |
| Colour temperature                            | 3000 K  |
| Colour variation LED                          | SDCM3   |
| Lamp  | LED cannot be replaced                        |
| LED life expectancy (max. °C)                 | 50000 h                                       |
| Service life LED L70B50 (25°)                 | > 60000 h                                     |
| Drop in luminous flux in accordance with LM80 | L70B10  |
| LED cooling system                            | HCMC (High Conductive<br>Magnesium Composite) |
| Output  | 13,7 W  |
| Colour Rendering Index CRI                    | = 82  |
| Product category                              | LED floodlight without sensor                 |
| Energieeffizienzklasse Lichtquelle            | Е   |

### LED floodlight without sensor

# XLED home 2


V2 white EAN 4007841 033125 Article number 033125




#### **Accessories**

| EAN 4007841 055875 | Corner wall mount XLED home 2/ PRO 240 |
|--------------------|--|
| EAN 4007841 053086 | Corner wall mount XLED Home 2/ Pro 240 |
| EAN 4007841 055615 | Corner wall mount XLED home 2/ PRO 240 |


### **Dimension Drawing**

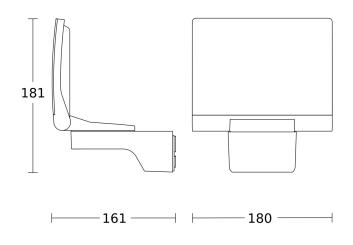

## **Light Distribution Curve**

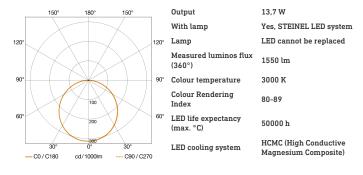

### Slave circuit diagram



01.2025