

Sensor-switched LED floodlight

XLED curved S

V2 Anthracite

EAN 4007841 012076

Article number 012076



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



infrared sensor 160°



max. 8 m



IP44



2 - 1000 lux



2 sec - 70 min



ideal 2 m



energy saving

3 years

manufacturer's warranty
steinel.de/garantie3y

Function description

Illuminating compact model. Sensor LED floodlight XLED curved S with 9,3 W, compact and discreet lighting solution for building entrances, pathways and co., attractive luminous efficiency (862 lm) requiring very little energy, sensor reach of up to 8 m, tilting range of +-30°.

Technical specifications

Dimensions (L x W x H)	120 x 160 x 107 mm	Detection angle	160 °
Mains power supply	220 – 240 V / 50 – 60 Hz	Capability of masking out individual segments	No
Sensor Technology	passive infrared	Electronic scalability	No
Output	9,3 W	Mechanical scalability	No
Power consumption	0,5 W	Photo-cell controller	Yes
Interconnection	No	Twilight setting	2 – 1000 lx
Luminous flux total product	862 lm	Time setting	2 s – 70 Min.
Total product efficiency	93 lm/W	Basic light level function	No
Measured luminous flux (360°)	862 lm	Soft light start	No
Colour temperature	3000 K	Impact resistance	IK03
Colour Rendering Index	80-89	IP-rating	IP44
With lamp	Yes, STEINEL LED system	Protection class	II
Lamp	LED cannot be replaced	Ambient temperature	-20 – 40 °C
LED life expectancy (max. °C)	50000 h	Housing material	Plastic
Service life LED L70B50 (25°)	> 60000 h	Cover material	Plastic, opal
Drop in luminous flux in accordance with LM80	L70B10	Manufacturer's Warranty	3 years
Base	without	Installation site	wall
LED cooling system	Passive Thermo Control	Version	Anthracite
With motion detector	Yes	PU1, EAN	4007841012076

Sensor-switched LED floodlight

XLED curved S


V2 Anthracite

EAN 4007841 012076

Article number 012076



Detection Zone

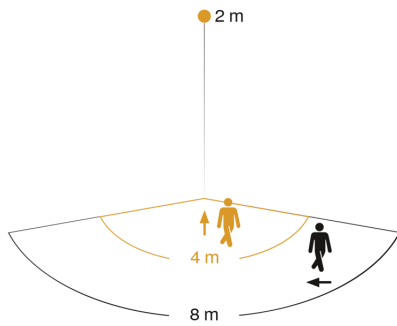


Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

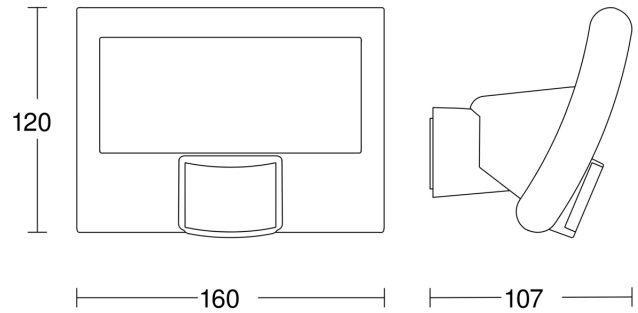

Circuit diagram 1

