

LED outdoor light without sensor - Professional Line

L 845 C

without motion detector, with Bluetooth
EAN 4007841 078638
Article number 078638



LED

3000 K



36 Jahre (Ø 4,5 Std / Tag)

3000K warmweiß

Außenleuchte

Vernetzbar via Bluetooth

IP44

0 - 100% Grundlicht

0 - 100% Hauptlicht

Lichtquelle nicht austauschbar

Betriebsgerät nicht austauschbar

Softlichtstart

Function description

Cubic design wall lamp L 845 C in elegant aluminium housing. Luminous flux: 719 lm, power: 9 W, colour temperature: 3000 K. Wireless commissioning, setting and networking based on Bluetooth Mesh and the STEINEL Connect App. Adjustable main light (0-100%). Further functions possible in conjunction with a sensor variant.

Technical specifications

Dimensions (L x W x H)	134 x 134 x 87 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	5 years
Settings via	App, Smartphone, Connect Bluetooth Mesh
With remote control	No
Version	without motion detector, with Bluetooth
PU1, EAN	4007841078638
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
includes sheet of self-adhesive numbers	No
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	I

Photo-cell controller	Yes
Luminous flux total product	719 lm
Measured luminous flux (360°)	719 lm
Total product efficiency	79,9 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B50
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Twilight setting	2 – 2000 lx
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes

<https://www.steinell.de>

Subject to technical modifications

04.2024 Page 1 from 3

LED outdoor light without sensor - Professional Line

L 845 C

without motion detector, with Bluetooth
EAN 4007841 078638
Article number 078638



Technical specifications

Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	9 W
Mounting height max.	2,50 m


Type of interconnection	Master/slave
Interconnection via	Bluetooth Mesh Connect
Colour Rendering Index CRI	= 82
Optimum mounting height	2 m

L 845 C


without motion detector, with Bluetooth
EAN 4007841 078638
Article number 078638



Dimension Drawing

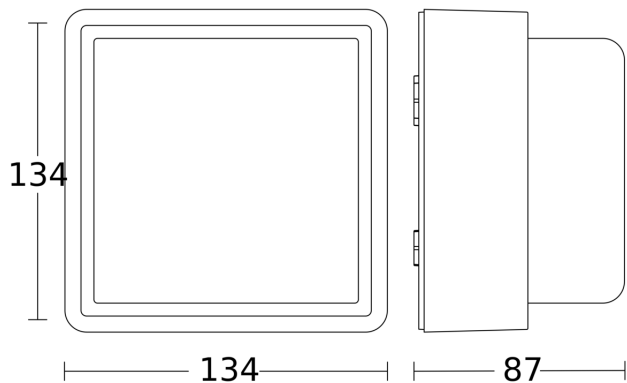

Circuit diagram Bluetooth



Circuit diagram Bluetooth

