

Presence detector - Professional Line

IR Quattro HD-2 24m

COM2 - Surface wiring
EAN 4007841 064341
Article number 064341



infrared sensor
360°



ideal 2,5 - 10 m



2 - 2000 lux



5 sec - 60 min



Settings via App



Pyro sensor
individually
controllable



max. 9 x 9 m
presence



brightness

Teach

Teach mode



plastic free
packaging

Function description

Designed for the finest detection in the largest detection area among our infrared presence detectors. Ideal for open-plan offices or classrooms. Infrared presence detector IR Quattro HD-2 with 360° detection capability and 5,200 switching zones. Wireless setting, adjustment and interconnection via Bluetooth. Pyro sensor individually controllable. For installation in ceilings (COM1, KNX V3.5) as well as for concealed and surface mounting (COM1, COM2, DALI-2 IPD, KNX V3.5, IP und BT IPD). Measured variables: Presence function and light level as well as temperature and humidity on the basis of IP, KNX and DALI-2 IPD. Max. mounting height 10 m. Reach: 81 m² (radial), 576 m² (tangential).

IR Quattro HD-2 24m

COM2 - Surface wiring
EAN 4007841 064341
Article number 064341



Technical specifications

Dimensions (L x W x H)	64 x 123 x 123 mm
Manufacturer's Warranty	5 years
Settings via	Connect Bluetooth Mesh, App, Potentiometers, Smartphone
With remote control	No
Version	COM2 - Surface wiring
PU1, EAN	4007841064341
Type	Presence detector
Application, place	Indoors
Application, room	lecture hall, classroom, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, duty room, recreation room, changing room, reception / lobby, sports hall, multi-storey / underground car park, dining hall / staff restaurant, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Surface wiring, Ceiling
IP-rating	IP54
Ambient temperature	-20 – 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Switching output 1, resistive	2000 W
Switching output 1, number of LEDs / fluorescent lamps	8 pcs.
Switching output 1, floating	No
Switching output 2, resistive	230 W
Switching output 2, floating	Yes
Fluorescent lamps, electronic ballast	1500 W
Fluorescent lamps, uncorrected	1000 VA
Fluorescent lamps, series-corrected	400 VA
Fluorescent lamps, parallel-corrected	1000 VA


Switching output 1, low-voltage halogen lamps	2000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	300 W
LED lamps > 8 W	600 W
Capacitive load in µF	176 µF
Power consumption	0,3 W
Technology, sensors	Light sensor, passive infrared
Mounting height	2,50 – 10,00 m
Mounting height max.	10,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Mechanical scalability	Yes
Reach, radial	9 x 9 m (81 m²)
Reach, tangential	24 x 24 m (576 m²)
Reach, presence	9 x 9 m (81 m²)
Functions	Group parameterisation, Semi-/fully automatic, Lighting scenario, Manual ON / ON-OFF, Neighbouring group function, Normal / test mode
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	Yes
Constant-lighting control	No
Interconnection	Yes
Interconnection via	Bluetooth Mesh Connect

IR Quattro HD-2 24m

COM2 - Surface wiring
EAN 4007841 064341
Article number 064341




Detection Zone

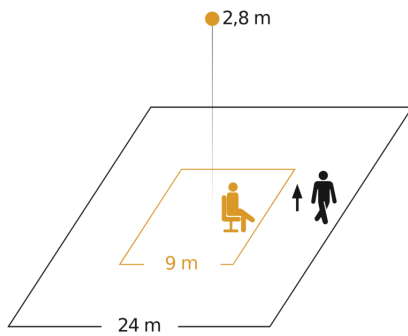

Possible mounting height: 2,50 m - 10,00 m
Orange: presence
Black: tangential

Dimension Drawing

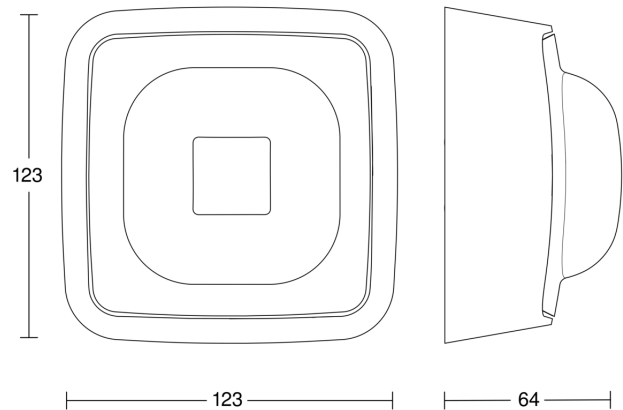

Master circuit diagram

