

LED indoor light without sensor

# RS 200 C

without motion detector, with Bluetooth  
EAN 4007841 078775  
Article number 078775



LED

long life LED 25.000 h



indoor

3000 K

3000K warm-white



IP54



connectable via bluetooth



Settings via App

CE

CE



Light source not  
exchangeable

## Function description

The RS 200 C is the first STEINEL Connect LED indoor luminaire in our indoor range for ceilings and walls. This means that it can be conveniently set, networked and operated via Bluetooth. Without cables. Without stress. The luminaire comes in a high-quality, anthracite-coloured aluminium housing. So you automatically create an all-round beautiful room atmosphere, rounded off with an ambient light on the wall.

## Technical specifications

With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	3 years
Settings via	Bluetooth, Smartphone, Tablet
With remote control	No
Version	without motion detector, with Bluetooth
PU1, EAN	4007841078775
Application, place	Indoors
Application, room	stairwell, Indoors, function room / ancillary room, corridor / aisle, recreation room
Colour	Anthracite
Installation site	wall, ceiling
Installation	Ceiling, Wall
Impact resistance	IK10
IP-rating	IP54
Protection class	I

Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED cooling system	Passive Thermo Control
Soft light start	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function, detail	LED effect light
Basic light level function time	1-60 min
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Bluetooth Mesh Connect
Lifetime LED according to IEC-62717 (L70)	54000
Lebensdauer LED nach IES TM-21 (L70)	54000
Fuse protection B10	134

<https://www.steinel.de>

Subject to technical modifications

01.2025 Page 1 from 2

LED indoor light without sensor

# RS 200 C

without motion detector, with Bluetooth  
EAN 4007841 078775  
Article number 078775



## Technical specifications

Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,5 W
Mounting height max.	4,00 m
HF-system	5,8 GHz
Transmitter power	< 1 mW
Luminous flux total product	1165 lm
Total product efficiency	68 lm/W


Fuse protection B16	215
Fuse protection C10	134
Fuse protection C16	215
Basic light level function in per cent	10 – 100 %
Output	17,1 W
Colour Rendering Index CRI	= 80
Photobiological safety in accordance with EN 62471	RG1
Product category	LED indoor light without sensor

## Accessories

EAN 4007841 088620

Wireless pushbutton TapDuo C

## Dimension Drawing

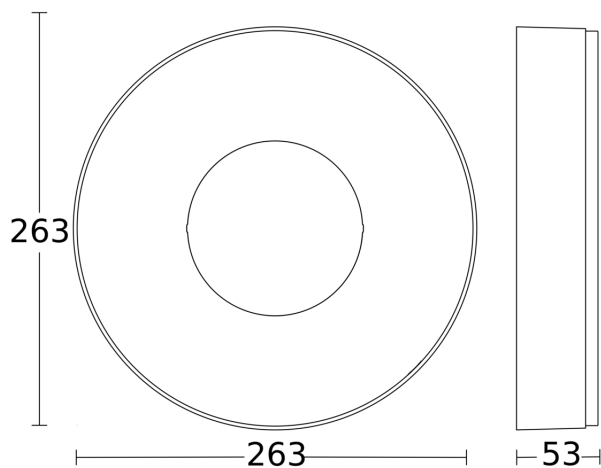

## Slave/wireless master interconnection circuit diagram

