

LED indoor light without sensor

RS 200 C

without motion detector, with Bluetooth
EAN 4007841 078775
Article number 078775



LED

Langlebige LED 25.000 h



Innenleuchte

3000 K

3000K warmweiß



IP54



Vernetzbar via Bluetooth



Einstellungen via App

CE

CE



Lichtquelle nicht austauschbar

Function description

The RS 200 C is the first STEINEL Connect LED indoor luminaire in our indoor range for ceilings and walls. This means that it can be conveniently set, networked and operated via Bluetooth. Without cables. Without stress. The luminaire comes in a high-quality, anthracite-coloured aluminium housing. So you automatically create an all-round beautiful room atmosphere, rounded off with an ambient light on the wall.

Technical specifications

With lamp	Yes, STEINEL LED system	Total product efficiency	68 lm/W
With motion detector	No	Colour temperature	3000 K
Manufacturer's Warranty	3 years	Colour variation LED	SDCM3
Settings via	Bluetooth, Smartphone, Tablet	Lamp	LED cannot be replaced
With remote control	No	LED cooling system	Passive Thermo Control
Version	without motion detector, with Bluetooth	Soft light start	Yes
PU1, EAN	4007841078775	Twilight setting	2 – 2000 lx
Application, place	Indoors	Time setting	5 s – 60 Min.
Application, room	stairwell, Indoors, function room / ancillary room, corridor / aisle, recreation room	Basic light level function	Yes
Colour	Anthracite	Basic light level function, detail	LED effect light
Installation site	wall, ceiling	Basic light level function time	1-60 min
Installation	Ceiling, Wall	Interconnection	Yes
Impact resistance	IK10	Type of interconnection	Master/master
IP-rating	IP54	Interconnection via	Bluetooth Mesh Connect
Protection class	I	Lifetime LED according to IEC-62717 (L70)	54000
		Lebensdauer LED nach IES TM-21 (L70)	54000

<https://www.steinell.de>

Subject to technical modifications

04.2024 Page 1 from 2

LED indoor light without sensor

RS 200 C

without motion detector, with Bluetooth
EAN 4007841 078775
Article number 078775



Technical specifications

Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,5 W
Mounting height max.	4,00 m
HF-system	5,8 GHz
Transmitter power	< 1 mW
Luminous flux total product	1165 lm


Fuse protection B10	134
Fuse protection B16	215
Fuse protection C10	134
Fuse protection C16	215
Basic light level function in per cent	10 – 100 %
Output	17,1 W
Colour Rendering Index CRI	= 80
Photobiological safety in accordance with EN 62471	RG1

Accessories

EAN 4007841 088620

Wireless pushbutton TapDuo C

Dimension Drawing

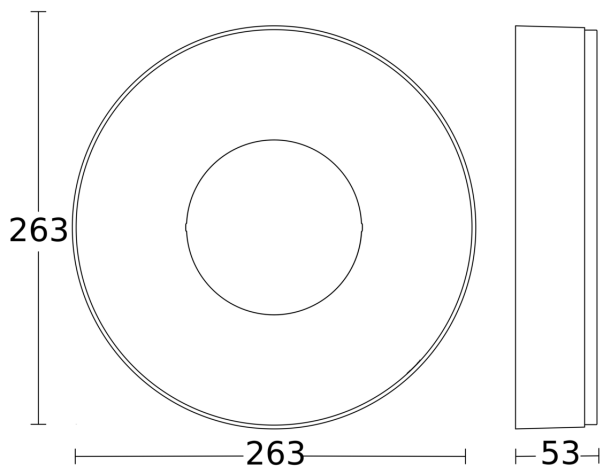

Slave/wireless master interconnection circuit diagram

