


# IR Quattro SLIM XS 4m

V3 KNX - square black  
 EAN 4007841 082260  
 Article number 082260



infrared sensor

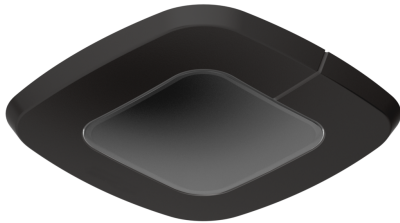

max. 4 x 4 m presence



IP20



KNX



10 - 1000 lux



ideal 2,5 - 4 m

Teach

Teach mode

iQ

iQ-mode

5 years

manufacturer's warranty steinel-professional.de/garantie



CE

## Function description

Our flattest presence detector. Now even smaller in flush-mounted box format. By popular demand. The extra-flat IR Quattro SLIM XS presence detector virtually disappears into the wall or ceiling. Thanks to the new and practical flush-mounted box format, it forms a strikingly unobtrusive symbiosis with the office environment and can now be installed in any commercially available flush-mounted box. In short: our flattest presence detector just pretends not to be there at all - and yet is absolutely present when it matters. Adjustment via remote control or Smart Remote. Round aperture is additionally enclosed.

## Technical specifications

Dimensions (L x W x H)	49 x 80 x 80 mm	Detection angle	360 °
Manufacturer's Warranty	5 years	Angle of aperture	71 °
Settings via	ETS software, Remote control, Bus, Smart Remote	Sneak-by guard	Yes
With remote control	No	Capability of masking out individual segments	No
Version	KNX - square black	Electronic scalability	No
PU1, EAN	4007841082260	Mechanical scalability	No
Type	Presence detector	Reach, radial	4 x 4 m (16 m <sup>2</sup> )
Application, place	Indoors	Reach, tangential	4 x 4 m (16 m <sup>2</sup> )
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors	Reach, presence	4 x 4 m (16 m <sup>2</sup> )
Colour	black	Switching zones	408 switching zones
Colour, RAL	9005	Twilight setting	10 - 1000 lx
Includes corner wall mount	No	Time setting	60 s - 255 Min.
Installation site	ceiling	Basic light level function	Yes
Installation	In-ceiling installation, Ceiling	Basic light level function time	Permanently ON, 1-255 min, all night
		Main light adjustable	0 - 100 %

# IR Quattro SLIM XS 4m


V3 KNX - square black  
 EAN 4007841 082260  
 Article number 082260

## Technical specifications

IP-rating	IP20
Ambient temperature	from 0 up to 40 °C
Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Technology, sensors	passive infrared, Light sensor
Mounting height	2,50 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m

Twilight setting TEACH	Yes
Constant-lighting control	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	10 mA
Product category	Presence detector

## Detection Zone

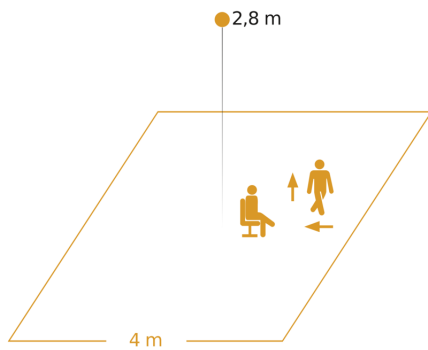

Possible mounting height: 2,50 m – 4,00 m  
 Orange: presence, tangential and radial

## Dimension Drawing

