


Presence detector - Professional Line

# IR Quattro SLIM XS 4m

V3 KNX - square black  
EAN 4007841 082260  
Article number 082260

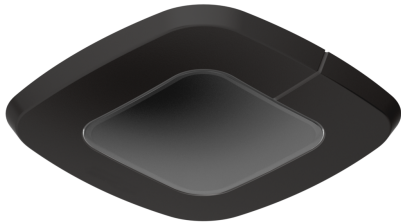

infrared sensor  
360°



max. 4 x 4 m  
presence



IP20



KNX



10 - 1000 lux



ideal 2,5 - 4 m

Teach

Teach mode

iQ

iQ-mode

5 years

manufacturer's  
warranty steinel-  
professional.de/  
garantie



CE

## Function description

## Technical specifications

Dimensions (L x W x H)	49 x 80 x 80 mm	Detection angle	360 °
Manufacturer's Warranty	5 years	Angle of aperture	71 °
Settings via	ETS software, Remote control, Bus, Smart Remote	Sneak-by guard	Yes
With remote control	No	Capability of masking out individual segments	No
Version	KNX - square black	Electronic scalability	No
PU1, EAN	4007841082260	Mechanical scalability	No
Type	Presence detector	Reach, radial	4 x 4 m (16 m <sup>2</sup> )
Application, place	Indoors	Reach, tangential	4 x 4 m (16 m <sup>2</sup> )
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors	Reach, presence	4 x 4 m (16 m <sup>2</sup> )
Colour	black	Switching zones	408 switching zones
Colour, RAL	9005	Twilight setting	10 - 1000 lx
Includes corner wall mount	No	Time setting	60 s - 255 Min.
Installation site	ceiling	Basic light level function	Yes
Installation	In-ceiling installation, Ceiling	Basic light level function time	Permanently ON, 1-255 min, all night
IP-rating	IP20	Main light adjustable	0 - 100 %
Ambient temperature	von 0 bis zu 40 °C	Twilight setting TEACH	Yes
		Constant-lighting control	Yes

<https://www.steinel.de>

Subject to technical modifications

03.2023 Page 1 from 2

# IR Quattro SLIM XS 4m

V3 KNX - square black  
 EAN 4007841 082260  
 Article number 082260




## Technical specifications

Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Technology, sensors	passive infrared, Light sensor
Mounting height	2,50 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m

KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	10 mA

## Detection Zone

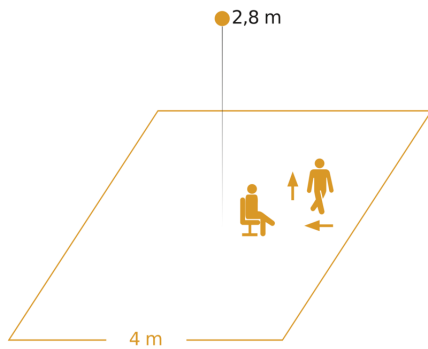

Possible mounting height: 2,50 m – 4,00 m  
 Orange: presence, tangential and radial

## Dimension Drawing

