

IR Quattro HD-2 24m

BT IPD - concealed
EAN 4007841 064396
Article number 064396



infrared sensor
360°



ideal 2,5 - 10 m



2 - 2000 lux



5 sec - 60 min



Settings via App



Pyro sensor
individually
controllable



max. 9 x 9 m
presence



brightness

Teach

Teach mode



plastic free
packaging

Function description

Designed for the finest detection in the largest detection area among our infrared presence detectors. Ideal for open-plan offices or classrooms. Infrared presence detector IR Quattro HD-2 with 360° detection capability and 5,200 switching zones. Wireless setting, adjustment and interconnection via Bluetooth. Pyro sensor individually controllable. For installation in ceilings (COM1, KNX V3.5) as well as for concealed and surface mounting (COM1, COM2, DALI-2 IPD, KNX V3.5, IP und BT IPD). Measured variables: Presence function and light level as well as temperature and humidity on the basis of IP, KNX and DALI-2 IPD. Max. mounting height 10 m. Reach: 81 m² (radial), 576 m² (tangential).

Technical specifications

Dimensions (L x W x H)	69 x 103 x 103 mm
Manufacturer's Warranty	5 years
Settings via	Bluetooth
With remote control	No
Version	BT IPD - concealed
PU1, EAN	4007841064396
Type	Presence detector
Application, place	Indoors
Application, room	lecture hall, classroom, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, duty room, recreation room, changing room, reception / lobby, sports hall, multi-storey / underground car park, dining hall / staff restaurant, Indoors
Colour	white
Colour, RAL	9003

Mounting height	2,50 – 10,00 m
Mounting height max.	10,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	160 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Mechanical scalability	Yes
Reach, radial	9 x 9 m (81 m ²)
Reach, tangential	24 x 24 m (576 m ²)
Reach, presence	9 x 9 m (81 m ²)
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Basic light level function	No

IR Quattro HD-2 24m

BT IPD - concealed
EAN 4007841 064396
Article number 064396



Technical specifications

Includes corner wall mount	No
Installation site	ceiling
Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	-20 – 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,3 W
Technology, sensors	Light sensor, passive infrared

Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Interconnection via	Bluetooth Mesh Connect


IR Quattro HD-2 24m

BT IPD - concealed

EAN 4007841 064396

Article number 064396

Detection Zone

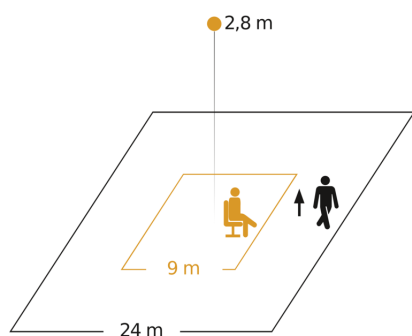


Possible mounting height: 2,50 m - 10,00 m

Orange: presence

Black: tangential

Dimension Drawing

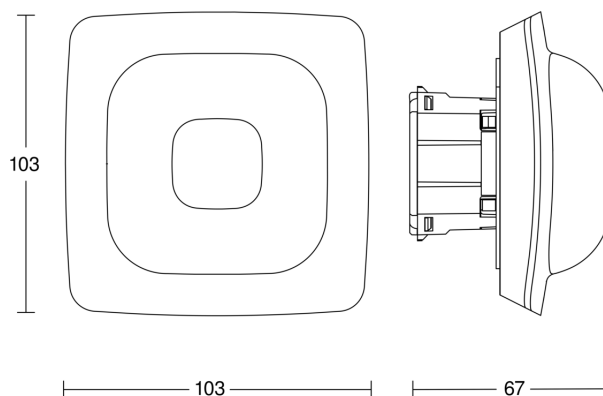

Circuit diagram

