

IR Quattro HD-2 24m

V3.5 KNX - in-ceiling installation
EAN 4007841 079413
Article number 079413



infrared sensor
360°



ideal 2.5 - 10 m



2 - 2000 lux



5 sec - 60 min



KNX



Settings via App



Pyro sensor
individually
controllable



max. 9 x 9 m
presence



brightness



Temperatur

Function description

Designed for the finest detection in the largest detection area among our infrared presence detectors. Ideal for open-plan offices or classrooms. Infrared presence detector IR Quattro HD-2 with 360° detection capability and 5,200 switching zones. Wireless setting, adjustment and interconnection via Bluetooth. Pyro sensor individually controllable. For installation in ceilings (COM1, KNX V3.5) as well as for concealed and surface mounting (COM1, COM2, DALI-2 IPD, KNX V3.5, IP und BT IPD). Measured variables: Presence function and light level as well as temperature and humidity on the basis of IP, KNX and DALI-2 IPD. Max. mounting height 10 m. Reach: 81 m² (radial), 576 m² (tangential).

Technical specifications

Dimensions (L x W x H)	106 x 103 x 103 mm	Mounting height	2,50 – 10,00 m
Manufacturer's Warranty	5 years	Mounting height max.	10,00 m
Settings via	Bus, ETS software, App, Potentiometers, Connect Bluetooth Mesh	Optimum mounting height	2,8 m
With remote control	No	Detection angle	360 °
Version	KNX - in-ceiling installation	Angle of aperture	160 °
PU1, EAN	4007841079413	Sneak-by guard	Yes
Type	Presence detector	Capability of masking out individual segments	Yes
Application, place	Indoors	Electronic scalability	Yes
Application, room	lecture hall, classroom, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, duty room, recreation room, changing room, reception / lobby, sports hall, multi-storey / underground car park, dining hall / staff restaurant, Indoors	Mechanical scalability	Yes
		Reach, radial	9 x 9 m (81 m ²)
		Reach, tangential	24 x 24 m (576 m ²)
		Reach, presence	9 x 9 m (81 m ²)
Colour	white	Twilight setting	2 – 2000 lx
		Time setting	10 s – 1092 Min.
		Basic light level function	Yes

IR Quattro HD-2 24m

V3.5 KNX - in-ceiling installation
EAN 4007841 079413
Article number 079413



Technical specifications

Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	In-ceiling installation, Ceiling
IP-rating	IP20
Ambient temperature	0 – 40 °C
Material	Plastic
Mains power supply	30 V
Power consumption	0,3 W
Power supply, detail	KNX bus
With bus coupling	Yes
Technology, sensors	Light sensor, passive infrared, Air humidity, Temperature

Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes
KNX functions	Comfort, Photo-cell controller, Individual pyro evaluation, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Humidity output, Presence output, Day / night function, Dewpoint, Temperature output, Logic gate
Interconnection	Yes
Interconnection via	KNX bus, Bluetooth Mesh Connect
Rated current	10 mA


IR Quattro HD-2 24m

V3.5 KNX - in-ceiling installation

EAN 4007841 079413

Article number 079413

Detection Zone

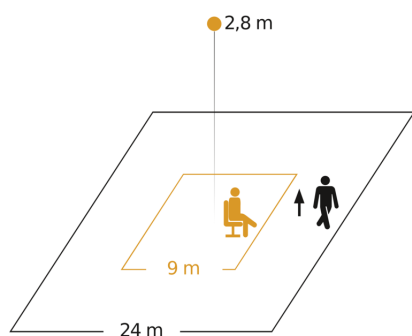


Possible mounting height: 2,50 m - 10,00 m

Orange: presence

Black: tangential

Dimension Drawing 1

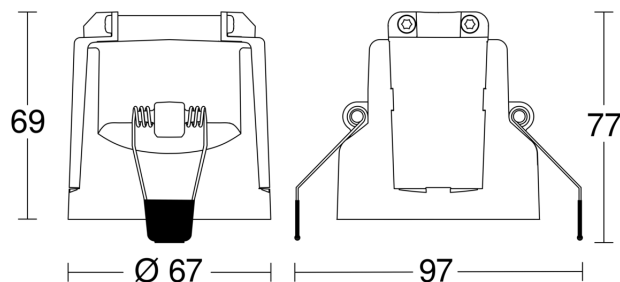

Dimension Drawing 2

