

Photoelectric lighting controller

# NightmatIQ

Anthracite  
EAN 4007841 066130  
Article number 066130



Dämmerungsschalter



1 - 75 Lux



IP54

1000 W

1000 W max. (LED-fähig)



Plastikfreie Verpackung



Energie sparen

3 years

Herstellergarantie



CE

## Function description

## Technical specifications

Dimensions (L x W x H)	38 x 95 x 95 mm
With motion detector	No
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	Anthracite
PU1, EAN	4007841066130
Type	Photo-cell controller
Application, place	Outdoors
Application, room	outdoors, front door, courtyard & driveway, Indoors, all round the building, terrace / balcony
Colour	Anthracite
Installation site	wall
Installation	Surface wiring, Wall
IP-rating	IP54

Ambient temperature	-20 – 40 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Switching output 1, resistive	1000 W
Fluorescent lamps, electronic ballast	250 W
Power consumption	0,7 W
Technology, sensors	Light sensor
Mounting height	1,80 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2 m
Twilight setting	1 – 75 lx
Interconnection	Yes
Interconnection via	Cable

<https://www.steinel.de>

Subject to technical modifications

04.2024 Page 1 from 2

Photoelectric lighting controller

# NightmatIQ


Anthracite

EAN 4007841 066130

Article number 066130



## Dimension Drawing

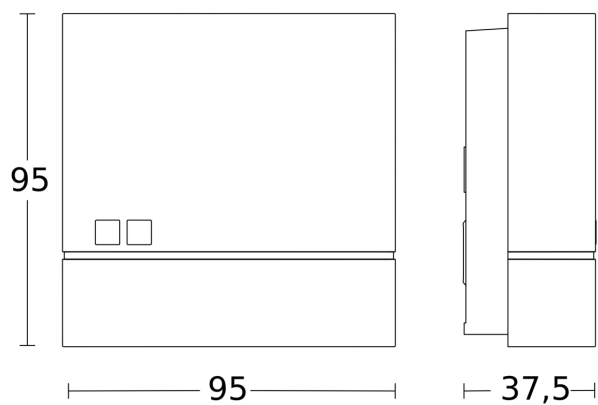

## Circuit diagram

