

Photoelectric lighting controller

NightmatIQ Plus

Anthracite

EAN 4007841 066116

Article number 066116



Dämmerungsschalter



1 - 1000 Lux



IP54

1000 W

1000 W max. (LED-fähig)



Vernetzbar via Bluetooth



Plastikfreie Verpackung



Energie sparen

3 years

Herstellergarantie



CE

Function description

Technical specifications

Dimensions (L x W x H)	38 x 95 x 95 mm
With motion detector	No
Manufacturer's Warranty	3 years
Settings via	Connect Bluetooth Mesh, App, Smartphone
With remote control	No
Version	Anthracite
PU1, EAN	4007841066116
Type	Photo-cell controller
Application, place	Outdoors
Application, room	outdoors, front door, courtyard & driveway, Indoors, all round the building, terrace / balcony
Colour	Anthracite
Installation site	wall
Installation	Surface wiring, Wall
IP-rating	IP54
Ambient temperature	-20 – 40 °C
Material	Plastic

Mains power supply	220 – 240 V / 50 – 60 Hz
Switching output 1, resistive	1000 W
Fluorescent lamps, electronic ballast	250 W
Power consumption	0,5 W
Technology, sensors	Light sensor
Mounting height	1,80 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2 m
Twilight setting	1 – 1000 lx
Basic light level function	No
Twilight setting TEACH	Yes
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Bluetooth Mesh Connect

<https://www.steinell.de>

Subject to technical modifications

04.2024 Page 1 from 2

Photoelectric lighting controller

NightmatIQ Plus


Anthracite

EAN 4007841 066116

Article number 066116



Dimension Drawing

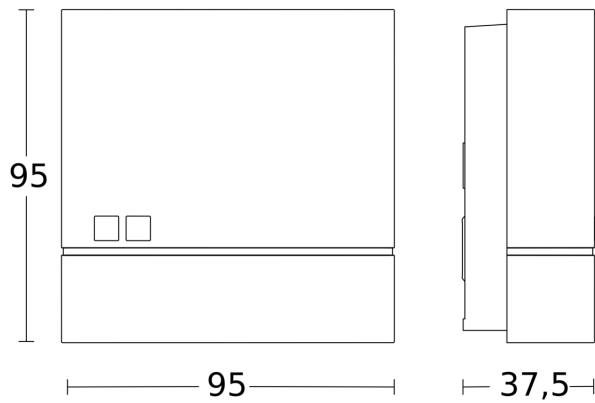

Circuit diagram

