

Photoelectric lighting controller

NightmatIQ Plus

white
EAN 4007841 066123
Article number 066123



Dämmerungsschalter



1 - 1000 Lux



IP54

1000 W

1000 W max. (LED-fähig)



Vernetzbar via Bluetooth



Plastikfreie Verpackung



Energie sparen

3 years

Herstellergarantie



CE

Function description

Technical specifications

| | | | |
|-------------------------|--|---------------------------------------|-----------------------------|
| Dimensions (L x W x H) | 38 x 95 x 95 mm | Mains power supply | 220 – 240 V / 50 – 60 Hz |
| With motion detector | No | Switching output 1, resistive | 1000 W |
| Manufacturer's Warranty | 3 years | Fluorescent lamps, electronic ballast | 250 W |
| Settings via | Connect Bluetooth Mesh, App, Smartphone | Power consumption | 0,5 W |
| With remote control | No | Technology, sensors | Light sensor |
| Version | white | Mounting height | 1,80 – 4,00 m |
| PU1, EAN | 4007841066123 | Mounting height max. | 4,00 m |
| Type | Photo-cell controller | Optimum mounting height | 2 m |
| Application, place | Outdoors | Twilight setting | 1 – 1000 lx |
| Application, room | outdoors, front door, courtyard & driveway, Indoors, all round the building, terrace / balcony | Basic light level function | No |
| Colour | white | Twilight setting TEACH | Yes |
| Installation site | wall | Constant-lighting control | No |
| Installation | Surface wiring, Wall | Interconnection | Yes |
| IP-rating | IP54 | Type of interconnection | Master/master, Master/slave |
| Ambient temperature | -20 – 40 °C | Interconnection via | Bluetooth Mesh Connect |
| Material | Plastic | | |

<https://www.steinel.de>

Subject to technical modifications

04.2024 Page 1 from 2

Photoelectric lighting controller

NightmatIQ Plus


white

EAN 4007841 066123

Article number 066123



Dimension Drawing

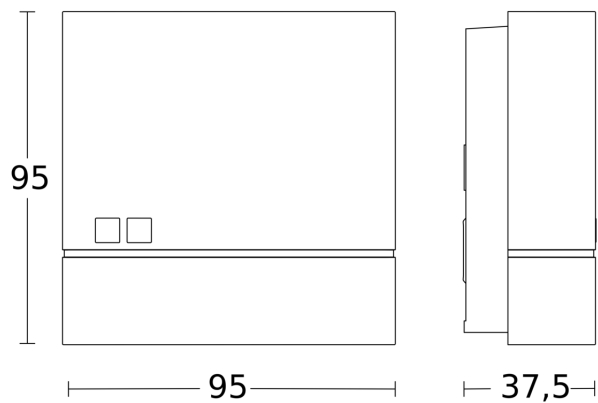

Circuit diagram

