

Sensor-switched LED outdoor light

# L 810 SC

Silver  
EAN 4007841 087562  
Article number 087562



Up-/Downlight

LED

30 years (0 4,5h / day)

3000 K

3000K warm-white



intelligent high frequency sensor 160°



1 - 5 m



IP44



2 - 2000 lux



Light source not exchangeable



Control gear not exchangeable



5 sec - 60 min

## Function description

The most modern outdoor light in the world. Designer sensor-switched outdoor light L 810 SC with invisible high-frequency sensor, ideal for building entrances and fronts of buildings, 9,8 W STEINEL LED lighting system, 679 lm, 160° coverage angle, reach from 1 - 5 m, for stylish up and downlighting, includes soft light start and optional manual override. Wirelessly interconnectable by Bluetooth and adjustable and controllable via free app.

## Technical specifications

Dimensions (L x W x H)	145 x 230 x 88 mm	Photo-cell controller	Yes
With lamp	Yes, STEINEL LED system	Transmitter range	30 m
Manufacturer's Warranty	3 years	Transmitter power	< 1 mW
Settings via	App, Bluetooth Mesh	Luminous flux total product	679 lm
With remote control	No	Measured luminous flux (360°)	679 lm
Version	Silver	Total product efficiency	69 lm/W
PU1, EAN	4007841087562	Colour temperature	3000 K
Application, place	Outdoors	Lamp	LED cannot be replaced
Application, room	garden, front door, courtyard & driveway, all round the building, terrace / balcony	Service life LED L70B50 (25°)	> 60000 h
Colour	Silver	Base	without
includes sheet of self-adhesive numbers	No	LED cooling system	Active and Passive Thermo Control
Package content	1	Soft light start	Yes
Installation site	wall	Continuous light	selectable
Impact resistance	IK03	Functions	Motions sensor
IP-rating	IP44	Twilight setting	2 – 2000 lx
		Time setting	5 s – 60 Min.
		Basic light level function	Yes

<https://www.steinel.de>

Subject to technical modifications

06.2026 Page 1 from 3

# L 810 SC

Silver  
 EAN 4007841 087562  
 Article number 087562



## Technical specifications

Protection class	II	Basic light level function time	OFF, Brightness-controlled, 10 sec - 60 min
Ambient temperature	from -20 up to 40 °C	Main light adjustable	10 - 100 %
Housing material	Aluminium	Interconnection	Yes
Cover material	Plastic, opal	Type of interconnection	Master/master, Master/slave
Mains power supply	220 – 240 V / 50 – 60 Hz	Basic light level function in per cent	10 – 100 %
Output	9,8 W	Basic light level function percentage, from	10 %
Mounting height max.	2,50 m	Basic light level function percentage, up to	100 %
Slave modeselectable	Yes	Interconnection via	Bluetooth Mesh
Sneak-by guard	No	Colour Rendering Index CRI	= 82
Capability of masking out individual segments	No	Optimum mounting height	2 m
Electronic scalability	Yes	Detection angle	160 °
Mechanical scalability	No	Product category	Sensor-switched LED outdoor light
Reach, detail	Detection zone adjustable on 2 axes		
Reach, radial	r = 5 m (35 m <sup>2</sup> )		
Reach, tangential	r = 5 m (35 m <sup>2</sup> )		

## Accessories

EAN 4007841 088620

Wireless pushbutton TapDuo C


Sensor-switched LED outdoor light

# L 810 SC

Silver  
EAN 4007841 087562  
Article number 087562




## Detection Zone

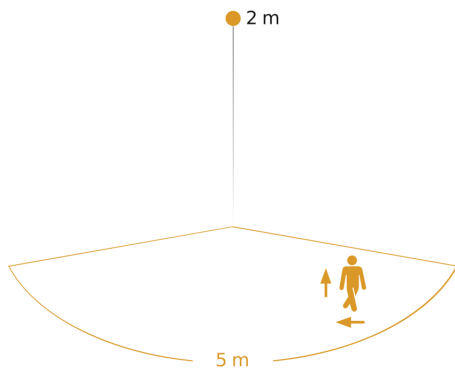

Possible mounting height: 1,80 m - 2,50 m  
Orange: radial and tangential

## Dimension Drawing

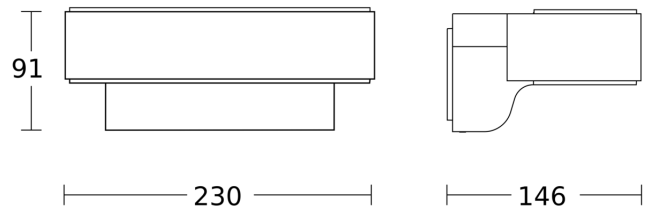

## Circuit diagram Bluetooth

