

# Relais REL5A-DALI-2

EAN 4007841 082109

Article number 082109



DALI-2



CE

## Function description

With the relay it is possible to integrate circuits into the DALI control: up to 50 pieces of up to 300 W LED luminaires (with a capacity of less than 176 µF). Control of the DALI bus in accordance with the DALI-2 standard to IEC 62386 Part 208. Separate power supply so that only one DALI device per 2 mA is required. Simple installation in standard flush-mounted boxes. Factory setting: relay closed.

## Technical specifications


Dimensions (L x W x H)	20 x 46 x 45 mm	Capacitive load in µF	176 µF
With motion detector	No	Number of Dali users	1
Manufacturer's Warranty	5 years	With bus coupling	No
Settings via	App, Bus	Sneak-by guard	No
With remote control	No	Capability of masking out individual segments	No
PUI, EAN	4007841082109	Mechanical scalability	No
Type	Other	Functions	Relay output
Colour	white	Basic light level function	No
Includes corner wall mount	No	Main light adjustable	No
IP-rating	IP20	Twilight setting TEACH	No
Ambient temperature	from -20 up to 50 °C	Constant-lighting control	No
Mains power supply	220 – 240 V / 50 – 60 Hz	Typical current consumption at 16V input voltage	2 mA
Switching output 1, resistive	1000 W	Max. Current consumption at 10V input voltage in regular operation	2 mA
Switching output 1, number of LEDs / fluorescent lamps	50 pcs.	Product category	System components
LED lamps > 8 W	300 W		

# Relais REL5A-DALI-2

EAN 4007841 082109

Article number 082109

Dimension Drawing

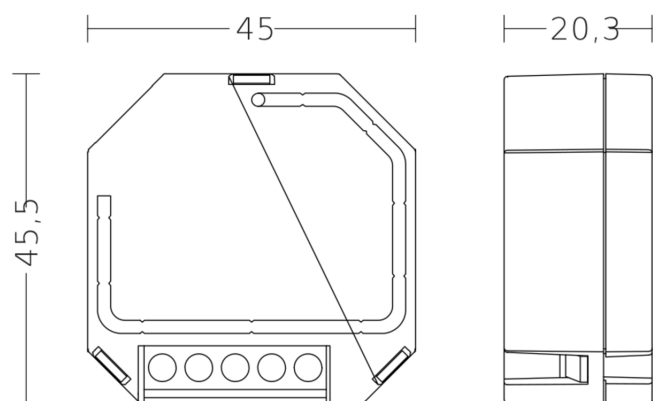

Circuit diagram 1

